
Flexi RF
Reliable RF Components In Stock

# Datasheet

## WR-137 to N Female Right Angle Waveguide to Coax Adapter with FDP70 Flange | 5.38 - 8.17GHz

WR137/N-K-V



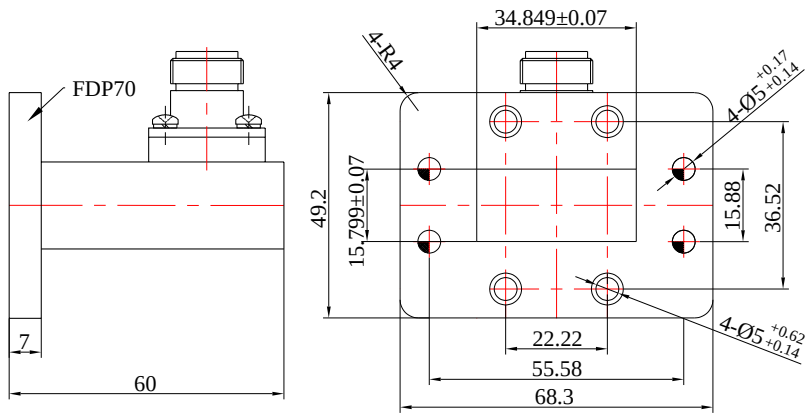


Dimensions are in mm

## Product Configuration

| | |
|---|---|
| Body Style | Right Angle |
| Flange Designation | FDP70 |
| Waveguide Size | WR-137 |
| Connector Series | N |
| Connector Polarity | Standard |
| Connector Gender | Female |
| Connector Impedance (Ohm) | 50 |

## Electrical Specifications

| | |
|---|---|
| VSWR / Return Loss | 1.25 |
| Frequency Range | 5.38 - 8.17GHz |

## Mechanical Data

| | |
|---|---|
| Weight (g) | 124 g |
| Body Material | Aluminum |

## Enviromental Specifications

| | |
|---|---|
| RoHS Compliant | Yes |
| Operating Temperature Range | -55 ºC to +125 ºC |


Flexi RF Inc
(650)880-9199
20195 Stevens Creek Blvd, Suite 220, Cupertino, CA 95014
sales@flexirf.com
www.flexirf.com