



# Caiman Versa

CCT Colour & Wattage Switchable Anti-Corrosive with plug-in Versabox accessories

## Features

|                        |                                   |
|------------------------|-----------------------------------|
| IK Rating              | IK10                              |
| IP Rating              | IP66                              |
| CSP Switchable         | Switchable CCT                    |
| Sensor Option          | Versabox, see accessories         |
| Dimmable Option        | Yes (DALI-2, 0-10V, PUSH-DIM)     |
| LED Lifetime           | L70 100,000h                      |
| Colour Rendering Index | CRI>80                            |
| Colour Consistency     | SDCM6                             |
| Emergency Option       | Yes, Manual, Self and DALI-2 Test |

## Installation information

|                           |   |
|---------------------------|---|
| Install Connector Type    | Removeable, moveable, loop in/out                 |
| Inrush Current            | 16A 0.51ms  |
| Construction Material     | Polycarbonate Housing (RAL7005), Anti-UV Diffuser |
| Weight                    | 1.3 - 2.15kg                                      |
| Ambient Temperature Range | -20°C - 35°C                                      |
| SELV                      | No  |
| UK Building Regulations   | Part L  |
| Electric Class (1, 2, 3)  | 1   |

## Wiring information

|                              |          |
|------------------------------|----------|
| Cable Required for Connector | N/A      |
| Type of Wiring Required      | Parallel |

## Accessories

|             |   |                 |
|-------------|---|-----------------|
| ACKITMANEM  | Manual Test Emergency plug-in Versabox                        | Sold Separately |
| ACKITSELFEM | Self Test Emergency plug-in Versabox                          | Sold Separately |
| ACKITMWS    | Microwave Sensor on/off Plug-in Kit                           | Sold Separately |
| ACKITMWSDIM | Microwave Sensor Dim plug-in Versabox (requires 0-10V driver) | Sold Separately |
| ACREMOTEMWS | Remote for Microwave Sensor                                   | Sold Separately |
| ACBESA      | BESA Mounting Bracket   | Sold Separately |



01604 495 151  
collingwoodlighting.com

- collingwoodled
- /collingwoodlighting
- collingwoodlighting

## Guarantee

7 years (product), 5 years (battery), 2 years (on-site)

## Features & benefits

CCT switchable between 3000K, 4000K & 5700K

Wattage Switchable

IP66 and IK10 for total protection

Unique full length mounting slider allows complete freedom of mounting positions

Versabox plug and play kit range to accommodate project requirements

Rear and side housing conduit entry points

Quick release moveable terminal block to suit mains cable entry point

All installation points marked to aid accurate pre-drilling


Supplied with mounting clips, hanging bracket and compression gland

Quick connect through-wired version for side entry also available


Light source energy efficiency:



Beam angle: 120°

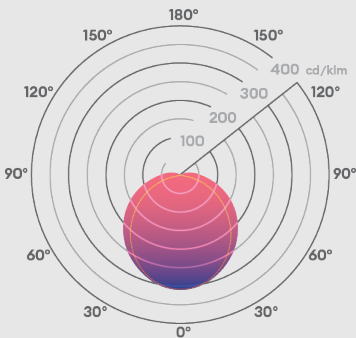

600mm (2ft)



1200mm (4ft)



1500mm (5ft)



1800mm (6ft)



92.3mm  
73mm




Photometrics @ 25°C

| Product code | Finish | Feature l    | W   | Colour | Beam | lm    | l/m/W | EM  |
|--------------|--------|--------------|-----|--------|------|-------|-------|-----|
| AC4N         | Grey   | 4ft (1200mm) | 18W | 3000K  | 120° | 2590  | 144   | -   |
| AC4N         | Grey   | 4ft (1200mm) | 18W | 4000K  | 120° | 2775  | 154   | -   |
| AC4N         | Grey   | 4ft (1200mm) | 18W | 5700K  | 120° | 2775  | 154   | -   |
| AC4N         | Grey   | 4ft (1200mm) | 37W | 3000K  | 120° | 5180  | 144   | -   |
| AC4N         | Grey   | 4ft (1200mm) | 37W | 4000K  | 120° | 5550  | 154   | -   |
| AC4N         | Grey   | 4ft (1200mm) | 37W | 5700K  | 120° | 5550  | 154   | -   |
| AC5N         | Grey   | 5ft (1500mm) | 28W | 3000K  | 120° | 3920  | 140   | -   |
| AC5N         | Grey   | 5ft (1500mm) | 28W | 4000K  | 120° | 4200  | 150   | -   |
| AC5N         | Grey   | 5ft (1500mm) | 28W | 5700K  | 120° | 4200  | 150   | -   |
| AC5N         | Grey   | 5ft (1500mm) | 56W | 3000K  | 120° | 7840  | 140   | -   |
| AC5N         | Grey   | 5ft (1500mm) | 56W | 4000K  | 120° | 8400  | 150   | -   |
| AC5N         | Grey   | 5ft (1500mm) | 56W | 5700K  | 120° | 8400  | 150   | -   |
| AC6N         | Grey   | 6ft (1800mm) | 33W | 3000K  | 120° | 4690  | 142   | -   |
| AC6N         | Grey   | 6ft (1800mm) | 33W | 4000K  | 120° | 5025  | 152   | -   |
| AC6N         | Grey   | 6ft (1800mm) | 33W | 5700K  | 120° | 5025  | 152   | -   |
| AC6N         | Grey   | 6ft (1800mm) | 67W | 3000K  | 120° | 9380  | 140   | -   |
| AC6N         | Grey   | 6ft (1800mm) | 67W | 4000K  | 120° | 10050 | 150   | -   |
| AC6N         | Grey   | 6ft (1800mm) | 67W | 5700K  | 120° | 10050 | 150   | -   |
| AC4NEM       | Grey   | 4ft (1200mm) | 18W | 3000K  | 120° | 2590  | 144   | 240 |
| AC4NEM       | Grey   | 4ft (1200mm) | 18W | 4000K  | 120° | 2775  | 154   | 240 |
| AC4NEM       | Grey   | 4ft (1200mm) | 18W | 5700K  | 120° | 2775  | 154   | 240 |
| AC4NEM       | Grey   | 4ft (1200mm) | 37W | 3000K  | 120° | 5180  | 144   | 240 |
| AC4NEM       | Grey   | 4ft (1200mm) | 37W | 4000K  | 120° | 5550  | 154   | 240 |
| AC4NEM       | Grey   | 4ft (1200mm) | 37W | 5700K  | 120° | 5550  | 154   | 240 |
| AC4D         | Grey   | 4ft (1200mm) | 37W | 3000K  | 120° | 5180  | 144   | -   |
| AC4D         | Grey   | 4ft (1200mm) | 37W | 4000K  | 120° | 5550  | 154   | -   |
| AC4D         | Grey   | 4ft (1200mm) | 37W | 5700K  | 120° | 5550  | 154   | -   |
| AC4V         | Grey   | 4ft (1200mm) | 37W | 3000K  | 120° | 5180  | 144   | -   |
| AC4V         | Grey   | 4ft (1200mm) | 37W | 4000K  | 120° | 5550  | 154   | -   |
| AC4V         | Grey   | 4ft (1200mm) | 37W | 5700K  | 120° | 5550  | 154   | -   |
| AC5NEM       | Grey   | 5ft (1500mm) | 28W | 3000K  | 120° | 3920  | 140   | 230 |
| AC5NEM       | Grey   | 5ft (1500mm) | 28W | 4000K  | 120° | 4200  | 150   | 230 |
| AC5NEM       | Grey   | 5ft (1500mm) | 28W | 5700K  | 120° | 4200  | 150   | 230 |
| AC5NEM       | Grey   | 5ft (1500mm) | 56W | 3000K  | 120° | 7840  | 140   | 230 |
| AC5NEM       | Grey   | 5ft (1500mm) | 56W | 4000K  | 120° | 8400  | 150   | 230 |
| AC5NEM       | Grey   | 5ft (1500mm) | 56W | 5700K  | 120° | 8400  | 150   | 230 |
| AC5D         | Grey   | 5ft (1500mm) | 56W | 3000K  | 120° | 7840  | 140   | -   |
| AC5D         | Grey   | 5ft (1500mm) | 56W | 4000K  | 120° | 8400  | 150   | -   |
| AC5D         | Grey   | 5ft (1500mm) | 56W | 5700K  | 120° | 8400  | 150   | -   |
| AC5V         | Grey   | 5ft (1500mm) | 56W | 3000K  | 120° | 7840  | 140   | -   |

\*Replace 'N' at the end of the part code with: 'NEM' for Manual-test Emergency models | 'D' for DALI-2/PUSH DIM | 'V' for 0-10V | Plug in kits also available as separate accessories. Energy rating is a reflection of the LED light source.



01604 495 151  
collingwoodlighting.com

-  collingwoodled
-  /collingwoodlighting
-  collingwoodlighting

Caiman Versa