



# Caiman Versa

CCT Colour & Wattage Switchable Anti-Corrosive with plug-in Versabox accessories

## Features

IK Rating	IK10
IP Rating	IP66
CSP Switchable	Switchable CCT
Sensor Option	Versabox, see accessories
Dimmable Option	Yes (DALI-2, 0-10V, PUSH-DIM)
LED Lifetime	L70 100,000h
Colour Rendering Index	CRI>80
Colour Consistency	SDCM6
Emergency Option	Yes, Manual, Self and DALI-2 Test

## Installation information

Install Connector Type	Removeable, moveable, loop in/out
Inrush Current	16A 0.51ms
Construction Material	Polycarbonate Housing (RAL7005), Anti-UV Diffuser
Weight	1.3 - 2.15kg
Ambient Temperature Range	-20°C - 35°C
SELV	No
UK Building Regulations	Part L
Electric Class (1, 2, 3)	1

## Wiring information

Cable Required for Connector	N/A
Type of Wiring Required	Parallel

## Accessories

ACKITMANEM	Manual Test Emergency plug-in Versabox	Sold Separately
ACKITSELFEM	Self Test Emergency plug-in Versabox	Sold Separately
ACKITMWS	Microwave Sensor on/off Plug-in Kit	Sold Separately
ACKITMWSDIM	Microwave Sensor Dim plug-in Versabox (requires 0-10V driver)	Sold Separately
ACREMOTEMWS	Remote for Microwave Sensor	Sold Separately
ACBESA	BESA Mounting Bracket	Sold Separately



collingwood

01604 495 151  
collingwoodlighting.com

- collingwoodled
- /collingwoodlighting
- collingwoodlighting

## Guarantee

7 years (product), 5 years (battery), 2 years (on-site)

## Features & benefits

CCT switchable between 3000K, 4000K & 5700K

Wattage Switchable

IP66 and IK10 for total protection

Unique full length mounting slider allows complete freedom of mounting positions

Versabox plug and play kit range to accommodate project requirements

Rear and side housing conduit entry points

Quick release moveable terminal block to suit mains cable entry point

All installation points marked to aid accurate pre-drilling


Supplied with mounting clips, hanging bracket and compression gland

Quick connect through-wired version for side entry also available


Light source energy efficiency:



Beam angle: 120°

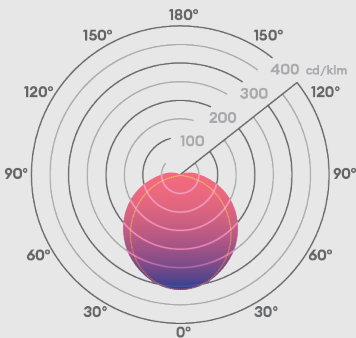


600mm (2ft)



1200mm (4ft)



1500mm (5ft)



1800mm (6ft)



92.3mm  
73mm




Photometrics @ 25°C

Product code	Finish	Feature l	W	Colour	Beam	lm	l/m/W	EM
AC4N	Grey	4ft (1200mm)	18W	3000K	120°	2590	144	-
AC4N	Grey	4ft (1200mm)	18W	4000K	120°	2775	154	-
AC4N	Grey	4ft (1200mm)	18W	5700K	120°	2775	154	-
AC4N	Grey	4ft (1200mm)	37W	3000K	120°	5180	144	-
AC4N	Grey	4ft (1200mm)	37W	4000K	120°	5550	154	-
AC4N	Grey	4ft (1200mm)	37W	5700K	120°	5550	154	-
AC5N	Grey	5ft (1500mm)	28W	3000K	120°	3920	140	-
AC5N	Grey	5ft (1500mm)	28W	4000K	120°	4200	150	-
AC5N	Grey	5ft (1500mm)	28W	5700K	120°	4200	150	-
AC5N	Grey	5ft (1500mm)	56W	3000K	120°	7840	140	-
AC5N	Grey	5ft (1500mm)	56W	4000K	120°	8400	150	-
AC5N	Grey	5ft (1500mm)	56W	5700K	120°	8400	150	-
AC6N	Grey	6ft (1800mm)	33W	3000K	120°	4690	142	-
AC6N	Grey	6ft (1800mm)	33W	4000K	120°	5025	152	-
AC6N	Grey	6ft (1800mm)	33W	5700K	120°	5025	152	-
AC6N	Grey	6ft (1800mm)	67W	3000K	120°	9380	140	-
AC6N	Grey	6ft (1800mm)	67W	4000K	120°	10050	150	-
AC6N	Grey	6ft (1800mm)	67W	5700K	120°	10050	150	-
AC4NEM	Grey	4ft (1200mm)	18W	3000K	120°	2590	144	240
AC4NEM	Grey	4ft (1200mm)	18W	4000K	120°	2775	154	240
AC4NEM	Grey	4ft (1200mm)	18W	5700K	120°	2775	154	240
AC4NEM	Grey	4ft (1200mm)	37W	3000K	120°	5180	144	240
AC4NEM	Grey	4ft (1200mm)	37W	4000K	120°	5550	154	240
AC4NEM	Grey	4ft (1200mm)	37W	5700K	120°	5550	154	240
AC4D	Grey	4ft (1200mm)	37W	3000K	120°	5180	144	-
AC4D	Grey	4ft (1200mm)	37W	4000K	120°	5550	154	-
AC4D	Grey	4ft (1200mm)	37W	5700K	120°	5550	154	-
AC4V	Grey	4ft (1200mm)	37W	3000K	120°	5180	144	-
AC4V	Grey	4ft (1200mm)	37W	4000K	120°	5550	154	-
AC4V	Grey	4ft (1200mm)	37W	5700K	120°	5550	154	-
AC5NEM	Grey	5ft (1500mm)	28W	3000K	120°	3920	140	230
AC5NEM	Grey	5ft (1500mm)	28W	4000K	120°	4200	150	230
AC5NEM	Grey	5ft (1500mm)	28W	5700K	120°	4200	150	230
AC5NEM	Grey	5ft (1500mm)	56W	3000K	120°	7840	140	230
AC5NEM	Grey	5ft (1500mm)	56W	4000K	120°	8400	150	230
AC5NEM	Grey	5ft (1500mm)	56W	5700K	120°	8400	150	230
AC5D	Grey	5ft (1500mm)	56W	3000K	120°	7840	140	-
AC5D	Grey	5ft (1500mm)	56W	4000K	120°	8400	150	-
AC5D	Grey	5ft (1500mm)	56W	5700K	120°	8400	150	-
AC5V	Grey	5ft (1500mm)	56W	3000K	120°	7840	140	-

\*Replace 'N' at the end of the part code with: 'NEM' for Manual-test Emergency models | 'D' for DALI-2/PUSH DIM | 'V' for 0-10V | Plug in kits also available as separate accessories. Energy rating is a reflection of the LED light source.



01604 495 151  
collingwoodlighting.com

-  collingwoodled
-  /collingwoodlighting
-  collingwoodlighting

Caiman Versa