
Flexi RF
Reliable RF Components In Stock

Datasheet

BMA Male Connector for RG405 or .086" Cable | 4 Holes Flange | DC-18GHz

P/N: FR2-BMA-JFB2

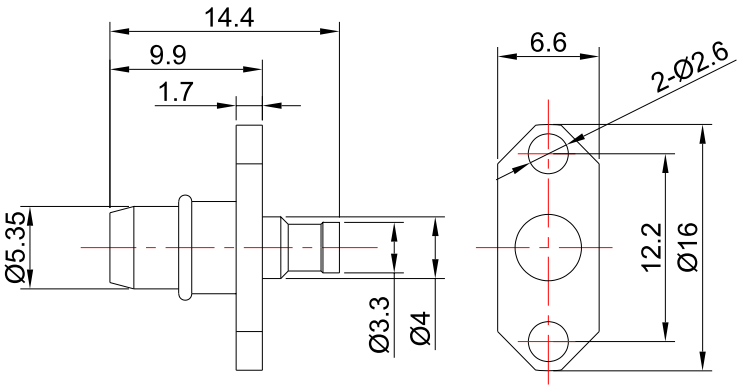

Dimensions are in mm

Product Configuration

Body Style	Straight
Connector Series	BMA
Connector Polarity	Standard
Connector Gender	Male
Termination Type	Coax
Connector Impedance (Ohm)	50
Mount Method	2 Hole Flange

Electrical Specifications

Frequency	DC - 18GHz
VSWR / Return Loss	1.30 to 18GHz
Insertion Loss	≤ 0.1 x Sqrt.(f_GHz)
RF Leakage	90dB

Mechanical Data

Min. Mating Cycles	≥500
Body Material	Brass
Body Plating	Gold

Enviromental Specifications

RoHS Compliant	Yes
Operating Temperature Range	-40°C to +125°C

Flexi RF Inc
(650)880-9199
20195 Stevens Creek Blvd, Suite 220, Cupertino, CA 95014
sales@flexirf.com
www.flexirf.com