
Flexi RF
Reliable RF Components In Stock

Datasheet

P/N: FR710-292FF000-XXX

2.92mm 4 Hole Flange Female to Trimmed Lead Cable Assembly | .086" Semi-Rigid GUT-085 (Copper) Coax Cable | DC - 40GHz



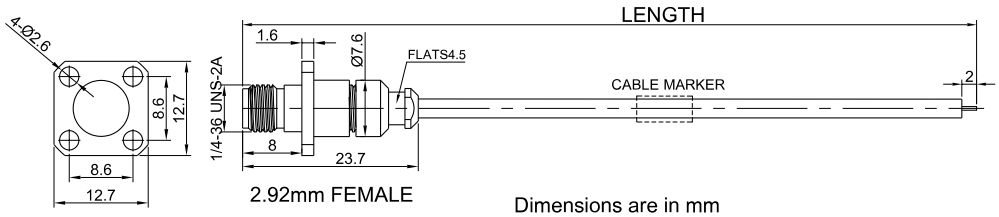

Connectors Configuration

	Connector 1
Connector Series	2.92mm
Connector Polarity	Standard
Connector Gender	Female
Connector Impedance (Ohm)	50
Connector Mount Method	4 Hole Flange
Connector Body Style	Straight
Connector Body Material	Stainless Steel
Connector Body Plating	Passivated

Cable Configuration

Cable Type	.086" Semi-rigid Cable (Copper)
Cable Impedance (Ohm)	50
Inner Conductor Material	Silver plated copperweld
Dielectric Material	Solid PTFE
Shield Layer 1 Material	Copper
Cable Diameter (mm)	2.2
Cable Color	Cooper
Minimum Bend Radius (mm)	6mm
Capacitance (pF/m)	95
Velocity of Propagation	70%
Shielding Effectiveness	<-120dB @ 1GHz



Flexi RF Inc

(650)880-9199
20195 Stevens Creek Blvd, Suite 220, Cupertino, CA 95014
sales@flexirf.com
www.flexirf.com

Electrical Data

Electrical Specifications for Different Length				
Length (mm)	Length Tolerance (mm)	Frequency	VSWR / Return Loss	Insertion Loss ≤ (dB)
100	±3	DC - 40GHz	1.4	1.32
150	±3			1.63
200	±3			1.94
250	±3			2.3
300	±3			2.56
400	±5			3.21
500	±5			3.82

Enviromental Specifications

RoHS Compliant	Yes
Operating Temperature Range	-45 ºC to +85 ºC

Revision History

Version	Description	Prepared By	Approved By	Date
V1.0	Initial release	Grimm	Hebe	2024-01-01