



BOL201 Bollard

Straight to mains, IP65, 930lm bollard

Features

IK Rating	IK04
IP Rating	IP65
CSP Switchable	Single CCT
Sensor Option	No
Dimmable Option	No
LED Lifetime	L70 30,000h
Colour Rendering Index	CRI>80
Colour Consistency	SDCM4

Installation information

UK Bathroom Zone	2
Inrush Current	20A 0.5ms
Construction Material	Aluminium / PVC
Weight	4.4Kg
Ambient Temperature Range	40°C
SELV	SELV
Electric Class (1, 2, 3)	1

Photometrics @ 25°C

Product code	Finish	W	Colour	Beam	lm	lm/W	lx @ 1m
BOL201X30	Black RAL9011	23W	3000K	360°	930	40	108

Wiring information

Cable Required for Connector	3x 1.0mm²
Type of Wiring Required	Parallel

LED driver

N/A (Integrated SLEV driver)	220-240V	Yes	No	2	N/A	N/A
------------------------------	----------	-----	----	---	-----	-----

Accessories

JB5	Waterproof junction box / Gel filled waterproof connectors	Sold Separately
-----	--	-----------------



01604 495 151
collingwoodlighting.com

- collingwoodled
- /collingwoodlighting
- collingwoodlighting

Guarantee

5 years


Features & benefits

- 23W
- IP65 ideal for car parks and walk ways
- Benefiting from light all round with a 360° beam angle
- Straight to mains screw terminals
- Comes complete with root mounting kit
- Low glare illumination, ideal for pathways, boundary marking, or general illumination of exterior spaces
- High lumen output of 930lm

Light source energy efficiency:

A t G E

Beam angle: 360°

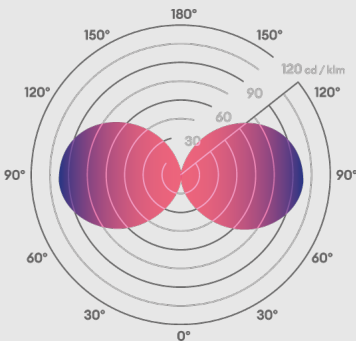

Ø145mm

