



BOL201 Bollard

Straight to mains, IP65, 930lm bollard

Features

IK Rating	IK04
IP Rating	IP65
CSP Switchable	Single CCT
LED Lifetime	L70 30,000h
Colour Rendering Index	CRI>80
Colour Consistency	SDCM4

Installation information

UK Bathroom Zone	2
Inrush Current	20A 0.5ms
Construction Material	Aluminium / PVC
Weight	4.4Kg
Ambient Temperature Range	40°C
SELV	SELV
Electric Class (1, 2, 3)	1

Photometrics @ 25°C

Product code	Finish	W	Colour	Beam	lm	lm/W	lx @ 1m
BOL201X30	Black RAL9011	23W	3000K	360°	930	40	108

Wiring information

Cable Required for Connector	3x 1.0mm ²
Type of Wiring Required	Parallel

LED driver

N/A (Integrated SLEV driver)	220-240V	Yes	No	2	N/A	N/A
------------------------------	----------	-----	----	---	-----	-----

Accessories

JB5	Waterproof junction box / Gel filled waterproof connectors	Sold Separately
-----	--	-----------------



01604 495 151
collingwoodlighting.com

- collingwoodled
- /collingwoodlighting
- collingwoodlighting

Guarantee

5 years

Features & benefits

- 23W
- IP65 ideal for car parks and walk ways
- Benefiting from light all round with a 360° beam angle
- Straight to mains screw terminals
- Comes complete with root mounting kit
- Low glare illumination, ideal for pathways, boundary marking, or general illumination of exterior spaces
- High lumen output of 930lm

Light source energy efficiency:


A

1

G

E

Beam angle: 360°

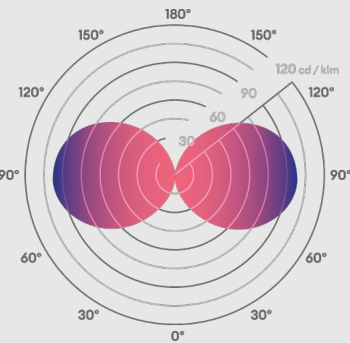

Ø145mm

