
Gwave
Fast Delivery RF Parts.

Datasheet

P/N: GAN9C-BNCMBNCM-XXX

BNC Male to BNC Male Cable Assembly | LMR400 Flexible Coax Cable With PE Jacket | DC - 3GHz

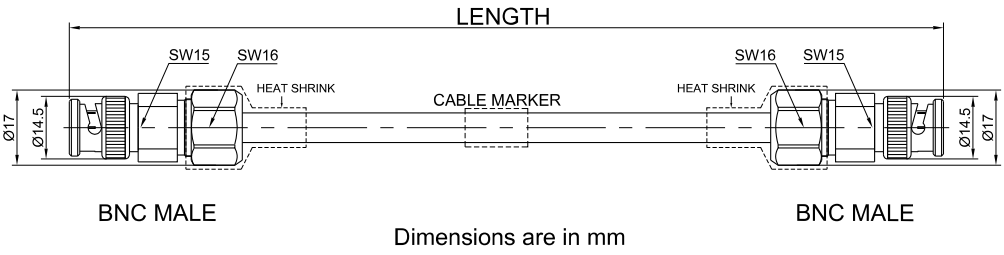

BNC MALE

BNC MALE

Dimensions are in mm



Connectors Configuration

	Connector 1	Connector 2
Connector Series	BNC	BNC
Connector Polarity	Standard	Standard
Connector Gender	Male	Male
Connector Impedance (Ohm)	50	50
Connector Body Style	Straight	Straight
Connector Body Material	Brass	Brass
Connector Body Plating	Nickel	Nickel

Cable Configuration

Cable Type	LMR400
Cable Impedance (Ohm)	50
Inner Conductor Material	Copper-clad aluminum wire
Dielectric Material	Foam PE
Number of Shields	2
Shield Layer 1 Material	Aluminum Tape
Shield Layer 2 Material	Tinned copper Braid
Jacket Material	PE
Cable Diameter (mm)	10.25
Cable Color	Black
Minimum Bend Radius (mm)	25.4
Capacitance (pF/m)	78.4
Velocity of Propagation	84%
Shielding Effectiveness	< -90dB @ 1GHz

Gwave Technology Inc

(888)251-2240

87 Patricia Ct, Mountain View, CA 94041

sales@gwavetech.com

www.gwavetech.com

P/N: GAN9C-BNCMBNCM-XXX

BNC Male to BNC Male Cable Assembly | LMR400 Flexible Coax Cable With PE Jacket | DC - 3GHz

Electrical Data

Electrical Specifications for Different Length				
Length (mm)	Length Tolerance (mm)	Frequency	VSWR / Return Loss	Insertion Loss ≤ (dB)
500	±5	DC - 3GHz	1.25 to 3GHz	0.25 to 3GHz
800	±10			0.30 to 3GHz
1000	±10			0.30 to 3GHz
1500	±15			0.43 to 3GHz
2000	±20			0.66 to 3GHz
3000	±30			0.92 to 3GHz
5000	±50			1.48 to 3GHz

Enviromental Specifications

RoHS Compliant	Yes
Operating Temperature Range	-40°C to +85°C