


Datasheet

P/N: GAU1-292M292WM-XXX

2.92mm Male to 2.92mm Right Angle Male Cable Assembly | 147A Series Low Loss Phase Stable Flexible Coax Cable | DC - 40GHz z | 2.8dB/m@40GHz



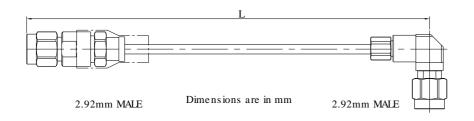

Connectors Configuration

Connector 1 Connector 2 **Connector Series** 2.92mm 2.92mm Standard Connector Polarity Standard Connector Gender Male Male Connector Impedance (Ohm) 50 50 Connector Body Style Straight Right Angle Connector Body Material Stainless Steel Stainless Steel Connector Body Plating Passivated **Passivated**

Cable Configuration

Cable Type GT147A Cable Impedance (Ohm)

Inner Conductor Material Silver Plated Copper Wire

LD-PTFE Dielectric Material


Number of Shields

Shield Layer 1 Material Silver Plated Copper Tape Shield Layer 2 Material Silver Plated Copper Braid

FEP Jacket Material 3.73 Cable Diameter (mm) Cable Color Turquoise Minimum Bend Radius (mm) 18

Capacitance (pF/m) 86 Velocity of Propagation 77%

Shielding Effectiveness > 100dB @ 1GHz



Gwave Technology Inc

(I) (888)251-2240



P/N: GAU1-292M292WM-XXX

2.92mm Male to 2.92mm Right Angle Male Cable Assembly | 147A Series Low Loss Phase Stable Flexible Coax Cable | DC - 40GHz z | 2.8dB/m@40GHz

Electrical Data

| Electrical Specifications for Different Length | | | | |
|--|-----------------------|------------|--------------------|-----------------------|
| Length (mm) | Length Tolerance (mm) | Frequency | VSWR / Return Loss | Insertion Loss ≤ (dB) |
| 500 | ±5 | DC - 40GHz | 1.35 to 40GHz | 2.1 to 40GHz |
| 600 | ±5 | | | 2.29 to 40GHz |
| 700 | ±5 | | | 2.59 to 40GHz |
| 800 | ±10 | | | 2.97 to 40GHz |
| 900 | ±10 | | | 3.15 to 40GHz |
| 1000 | ±10 | | | 3.51 to 40GHz |
| 1500 | ±15 | | | 4.92 to 40GHz |
| 2000 | ±20 | | | 6.33 to 40GHz |
| 3000 | ±30 | | | 9.16 to 40GHz |
| 5000 | ±50 | | | 14.76 to 40GHz |

Enviromental Specifications


RoHS Compliant


Yes

Operating Temperature Range

-55 °C to +125 °C

Test Report for Cable assembly

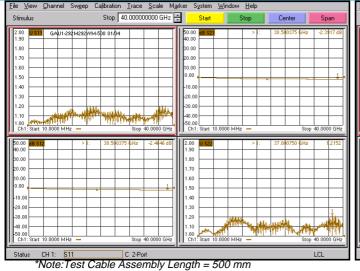

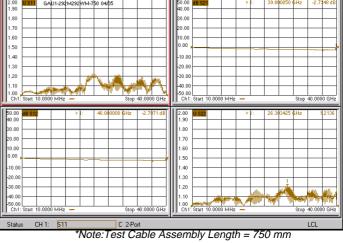

Calibration Irace Scale Marker System Window Help

 $\dot{\exists}$

Start 10.000000 MHz

Gwave Technology Inc

(388)251-2240

- sales@gwavetech.com
- @ www.gwavetech.com