



# BOL300 Midi Bollard

Straight to mains, IP65, 500lm bollard

## Features

|                        |             |
|------------------------|-------------|
| IK Rating              | IK08        |
| IP Rating              | IP65        |
| CSP Switchable         | Single CCT  |
| Sensor Option          | No          |
| Dimmable Option        | No          |
| LED Lifetime           | L70 30,000h |
| Colour Rendering Index | CRI>80      |
| Colour Consistency     | SDCM4       |

## Installation information

|                           |                 |
|---------------------------|-----------------|
| UK Bathroom Zone          | 2               |
| Inrush Current            | 20A             |
| Construction Material     | Aluminium / PVC |
| Weight                    | 2.9Kg           |
| Ambient Temperature Range | 40°C            |
| SELV                      | SELV            |
| Electric Class (1, 2, 3)  | 1               |

## Photometrics @ 25°C

| Product code | Finish        | W   | Colour | Beam | lm  | lm/W | lx @ 1m |
|--------------|---------------|-----|--------|------|-----|------|---------|
| BOL300X30    | Black RAL9011 | 23W | 3000K  | 360° | 500 | 22   | 144     |

## Wiring information

|                              |           |
|------------------------------|-----------|
| Cable Required for Connector | 3x 1.0mm² |
| Type of Wiring Required      | Parallel  |

## LED driver

|                              |          |     |    |   |     |     |
|------------------------------|----------|-----|----|---|-----|-----|
| N/A (Integrated SLEV driver) | 220-240V | Yes | No | 2 | N/A | N/A |
|------------------------------|----------|-----|----|---|-----|-----|

## Accessories

|     |  |                 |
|-----|--|-----------------|
| JB5 | Waterproof junction box / Gel filled waterproof connectors | Sold Separately |
|-----|--|-----------------|



01604 495 151  
collingwoodlighting.com

- collingwoodled
- /collingwoodlighting
- collingwoodlighting

## Guarantee

5 years


## Features & benefits

- 23W
- IP65 ideal for car parks and walk ways
- Benefiting from light all round with a 360° beam angle
- Straight to mains screw terminals
- Domed top for a low glare finish, and a minimum up spill of light making it comfortable on the eye
- IK08 rated

Light source  
energy efficiency:



Beam angle: 360°

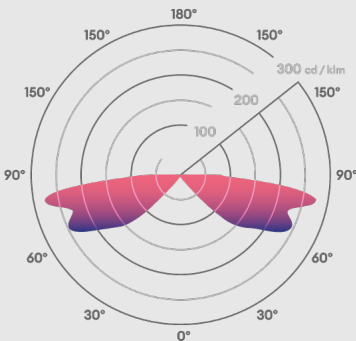

Ø150mm

