



# Borealis 4ft Twin

4ft Twin, LED Batten

## Features

<b>IK Rating</b>	IK06
<b>IP Rating</b>	IP20
<b>CSP Switchable</b>	Single CCT
<b>UGR</b>	26
<b>Sensor Option</b>	On-Off Microwave sensor & daylight switching available
<b>Dimmable Option</b>	Yes (DALI-2, 0-10V)
<b>LED Lifetime</b>	L70 54,000h
<b>Colour Rendering Index</b>	CRI>80
<b>Colour Consistency</b>	SDCM6
<b>Emergency Option</b>	Yes, Manual and DALI-2 Test

## Installation information

<b>Install Connector Type</b>	Loop in / Loop out
<b>Inrush Current</b>	15A 0,2ms
<b>Construction Material</b>	Steel body, white powder coating PC opal diffuser
<b>Weight</b>	1.44Kg, EM Version: 1.7Kg
<b>Ambient Temperature Range</b>	-20°C - 40°C
<b>SELV</b>	Yes
<b>UK Building Regulations</b>	Part P
<b>Electric Class (1, 2, 3)</b>	1

## Photometrics @ 25°C

Product code	Finish	Feature I	Feature II	Feature III	W	Colour	Beam	lm	lm/W	lx @ 1m	EM
BT4TS40	White	40W Non-Dim	No sensor	Non emergency	40W	4000K	120°	5200	130	1354	-
BT4TS40EM	White	40W Non-Dim	No sensor	Emergency	40W	4000K	120°	5200	130	1354	250
BT4TD40	White	DALI-2 / PUSH-DIM	No sensor	Non emergency	40W	4000K	120°	5200	130	1354	-
BT4TD40EM	White	DALI-2 / PUSH-DIM	No sensor	Emergency	40W	4000K	120°	5200	130	1354	250
BT4TV40	White	1-10V	No sensor	Non emergency	40W	4000K	120°	5200	130	1354	-

Energy rating is a reflection of the LED light source.

## Wiring information

<b>Cable Required for Connector</b>	H05RN-F cable diameter 4 - 10mm, max conductor size 3x 1.5mm <sup>2</sup>
<b>Type of Wiring Required</b>	Parallel

## Accessories

<b>BTSK1</b>	Suspension Kit - 2 steel wires, with holders.	Sold Separately
<b>PIRBOLT</b>	On-off PIR sensor with daylight switch	Sold Separately
<b>PIRBOLTDIM</b>	Dimming PIR Sensor with Lux Level switch 0-2000lx	Sold Separately
<b>PIRBOLTDIMR</b>	Remote control for use with PIRBOLTDIM	Sold Separately
<b>EMBOLTMOPEN</b>	Bolt-on emg conversion pack, Man-Test, 200lm	Sold Separately
<b>EMBOLTMCOR</b>	Bolt-on emg conversion pack, Man-Test, 200lm	Sold Separately
<b>EMBOLTSOPEN</b>	Bolt-on emg conversion pack, Self-Test, 200lm	Sold Separately



01604 495 151  
collingwoodlighting.com

collingwoodled

/collingwoodlighting

collingwoodlighting

## Guarantee

5 years (product), 2 years (emerg battery)

## Features & benefits

High efficacy of 130lm/W

Suspended gear tray for easy installation

Emergency option available

Multiple fixing points and several wiring options

Flicker free

Ideal for sheds, garages and warehouses


MW sensing range adjustable, up to 4m high, 8m diameter

Diffuser is released by side buttons and is easily accessible through loop-in/loop-out terminals

Light source energy efficiency:



Beam angle: 120°

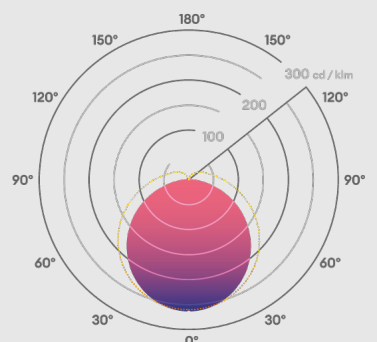

1220mm



70mm

