


## WR-187 to N Female Right Angle Waveguide to Coax Adapter with FDP48 Flange | 3.94 - 5.99GHz

WR187/N-K-V

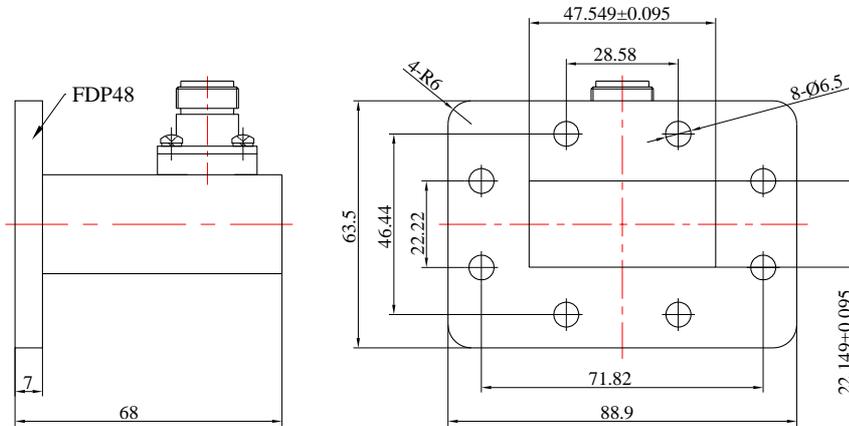

Dimensions are in mm

### Product Configuration

|                           |             |
|---------------------------|-------------|
| Body Style                | Right Angle |
| Flange Designation        | FDP48       |
| Waveguide Size            | WR-187      |
| Connector Series          | N           |
| Connector Polarity        | Standard    |
| Connector Gender          | Female      |
| Connector Impedance (Ohm) | 50          |

### Electrical Specifications

|                    |                |
|--------------------|----------------|
| VSWR / Return Loss | 1.25           |
| Frequency Range    | 3.94 - 5.99GHz |

### Mechanical Data

|               |          |
|---------------|----------|
| Weight (g)    | 178 g    |
| Body Material | Aluminum |

### Environmental Specifications

|                             |                   |
|-----------------------------|-------------------|
| RoHS Compliant              | Yes               |
| Operating Temperature Range | -55 °C to +125 °C |