

Datasheet

WR-34 to 2.92mm Female Straight Waveguide to Coax Adapter with FBP260 Flange | 21.7 - 33GHz | Material (Coating): Aluminum Alloy (Natural Color Conductive Oxidation)

WR34/2.92-FBP260-K-T



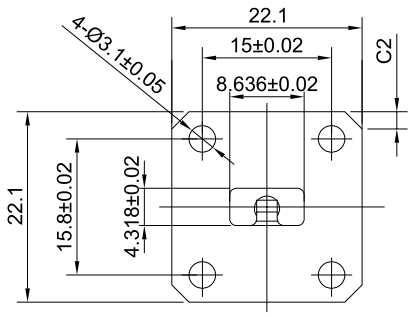



Dimensions are in mm

Product Configuration

Body Style	Straight
Flange Designation	FBP260
Waveguide Size	WR-34
Connector Series	2.92mm
Connector Polarity	Standard
Connector Gender	Female
Connector Impedance (Ohm)	50

Electrical Specifications

VSWR / Return Loss	1.25
Frequency Range	22-33GHz

Mechanical Data

Body Material	Brass
Body Plating	Paint

Enviromental Specifications

RoHS Compliant	Yes

Gwave Technology Inc

(888)251-2240

87 Patricia Ct, Mountain View, CA 94041

sales@gwavetech.com

www.gwavetech.com