



**WR-34 to 2.92mm Female Straight Waveguide to Coax Adapter with FBP260 Flange | 21.7 - 33GHz | Material (Coating): Aluminum Alloy (Natural Color Conductive Oxidation)**

**WR34/2.92-FBP260-K-T**

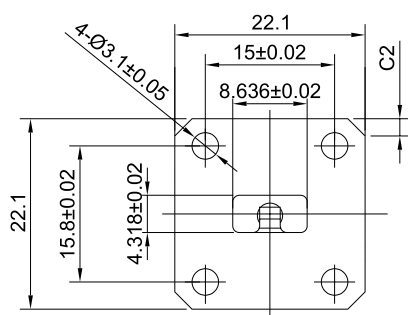

Dimensions are in mm

## Product Configuration

|                           |          |
|---------------------------|----------|
| Body Style                | Straight |
| Flange Designation        | FBP260   |
| Waveguide Size            | WR-34    |
| Connector Series          | 2.92mm   |
| Connector Polarity        | Standard |
| Connector Gender          | Female   |
| Connector Impedance (Ohm) | 50       |

## Electrical Specifications

|                    |          |
|--------------------|----------|
| VSWR / Return Loss | 1.25     |
| Frequency Range    | 22-33GHz |

## Mechanical Data

|               |       |
|---------------|-------|
| Body Material | Brass |
| Body Plating  | Paint |

## Environmental Specifications

|                |     |
|----------------|-----|
| RoHS Compliant | Yes |
|----------------|-----|