
WR-51 to SMA Female Right Angle Waveguide to Coax Adapter with FBP180 Flange | 14.5-22GHz

WR51/SMA-K-V



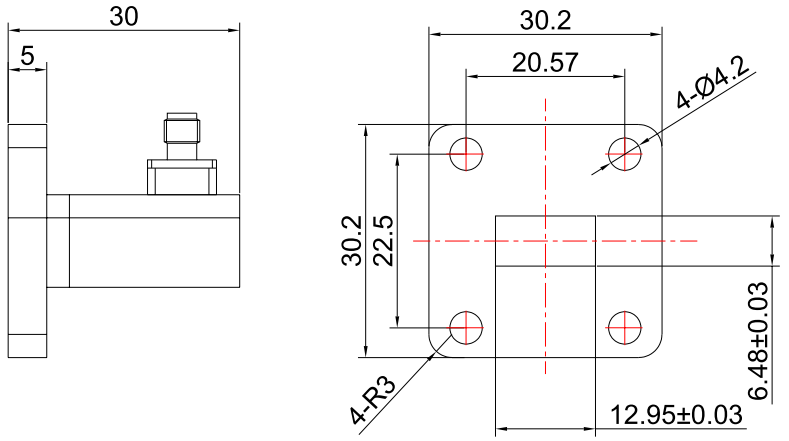

Dimensions are in mm

Product Configuration

Body Style	Right Angle
Flange Designation	FBP180
Waveguide Size	WR-51
Connector Series	SMA
Connector Polarity	Standard
Connector Gender	Female
Connector Impedance (Ohm)	50

Electrical Specifications

VSWR / Return Loss	1.2
Insertion Loss	≤ 0.3dB
Frequency Range	14.5 - 22 GHz

Mechanical Data

Body Material	Aluminum
Body Plating	Paint

Enviromental Specifications

RoHS Compliant	Yes
Operating Temperature Range	-55 ºC to +125 ºC

Gwave Technology Inc
(888)251-2240
87 Patricia Ct, Mountain View, CA 94041
sales@gwavetech.com
www.gwavetech.com