



Borealis 5ft Twin

5ft Twin, LED Batten

Features

IK Rating	IK06
IP Rating	IP20
CSP Switchable	Single CCT
UGR	26
Sensor Option	On-Off Microwave sensor & daylight switching available
Dimmable Option	Yes (DALI-2, 0-10V)
LED Lifetime	L70 54,000h
Colour Rendering Index	CRI>80
Colour Consistency	SDCM6
Emergency Option	Yes, Manual and DALI-2 Test

Installation information

Install Connector Type	Loop in / Loop out
Inrush Current	20A 0,2ms
Construction Material	Steel body, white powder coating PC opal diffuser
Weight	1.77Kg, EM Version: 2.03Kg
Ambient Temperature Range	-20°C - 40°C
SELV	Yes
UK Building Regulations	Part P
Electric Class (1, 2, 3)	1

Photometrics @ 25°C

Product code	Finish	Feature I	Feature II	Feature III	W	Colour	Beam	lm	lm/W	lx @ 1m	EM
BT5TS40	White	54W Non-Dim	No sensor	Non emergency	54W	4000K	120°	7020	130	1894	-
BT5TS40EM	White	54W Non-Dim	No sensor	Emergency	54W	4000K	120°	7020	130	1894	250
BT5TD40	White	DALI-2 / PUSH-DIM	No sensor	Non emergency	54W	4000K	120°	7020	130	1894	-
BT5TD40EM	White	DALI-2 / PUSH-DIM	No sensor	Emergency	54W	4000K	120°	7020	130	1894	250
BT5TV40	White	1-10V	No sensor	Non emergency	54W	4000K	120°	7020	130	1894	-

Energy rating is a reflection of the LED light source.

Wiring information

Cable Required for Connector	H05RN-F cable diameter 4 - 10mm, max conductor size 3x 1.5mm ²
Type of Wiring Required	Parallel

Accessories

BTSK1	Suspension Kit - 2 steel wires, with holders.	Sold Separately
PIRBOLT	On-off PIR sensor with daylight switch	Sold Separately
PIRBOLTDIM	Dimming PIR Sensor with Lux Level switch 0-2000lx	Sold Separately
PIRBOLTDIMR	Remote control for use with PIRBOLTDIM	Sold Separately
EMBOLTMOPEN	Bolt-on emg conversion pack, Man-Test, 200lm	Sold Separately
EMBOLTMCOR	Bolt-on emg conversion pack, Man-Test, 200lm	Sold Separately
EMBOLTSOPEN	Bolt-on emg conversion pack, Self-Test, 200lm	Sold Separately



01604 495 151
collingwoodlighting.com

collingwoodled
 /collingwoodlighting
 collingwoodlighting

Guarantee

5 years (product), 2 years (emerg battery)


Features & benefits

High efficacy of 130lm/W
Suspended gear tray for easy installation
Emergency option available
Multiple fixing points and several wiring options
Flicker free
Ideal for sheds, garages and warehouses
MW sensing range adjustable, up to 4m high, 8m diameter
Diffuser is released by side buttons and is easily accessible through loop-in/loop-out terminals


Light source
energy efficiency:



Beam angle: 120°

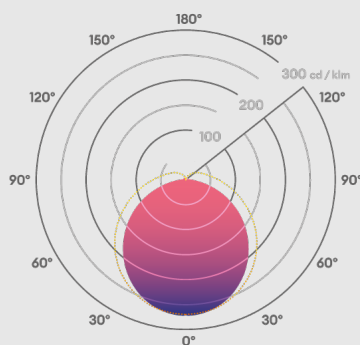

1524mm



70mm

