
WR-75 to N Female Right Angle Waveguide to Coax Adapter with FBP120 Flange | 9.84 - 15GHz

WR75/N-K-V



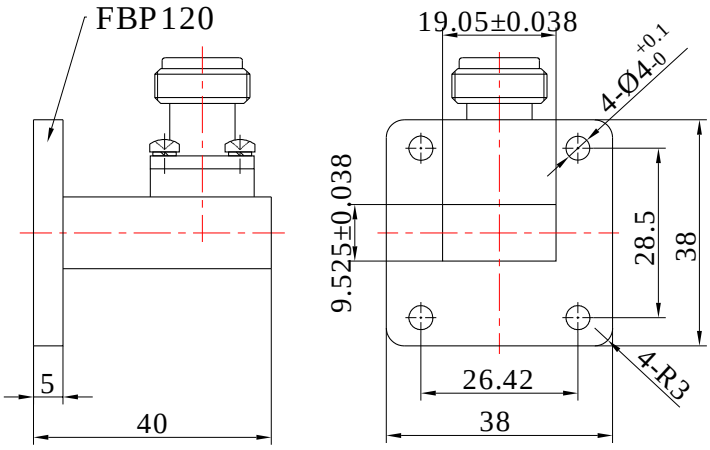

Dimensions are in mm

Product Configuration

Body Style	Right Angle
Flange Designation	FBP120
Waveguide Size	WR-75
Connector Series	N
Connector Polarity	Standard
Connector Gender	Female
Connector Impedance (Ohm)	50

Electrical Specifications

VSWR / Return Loss	1.25
Frequency Range	9.84 - 15GHz

Mechanical Data

Weight (g)	50 g
Body Material	Brass

Enviromental Specifications

RoHS Compliant	Yes
Operating Temperature Range	-55 ºC to +125 ºC

Gwave Technology Inc
(888)251-2240
87 Patricia Ct, Mountain View, CA 94041
sales@gwavetech.com
www.gwavetech.com