


WR-75 to N Female Right Angle Waveguide to Coax Adapter with FBP120 Flange | 9.84 - 15GHz

WR75/N-K-V



Dimensions are in mm

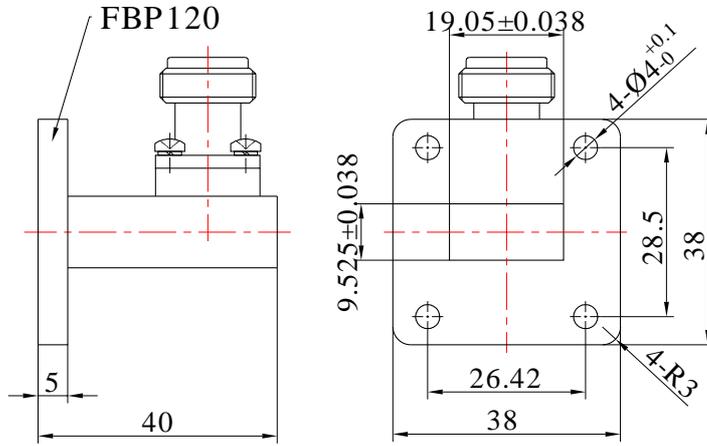

Product Configuration

| | |
|---------------------------|-------------|
| Body Style | Right Angle |
| Flange Designation | FBP120 |
| Waveguide Size | WR-75 |
| Connector Series | N |
| Connector Polarity | Standard |
| Connector Gender | Female |
| Connector Impedance (Ohm) | 50 |

Electrical Specifications

| | |
|--------------------|--------------|
| VSWR / Return Loss | 1.25 |
| Frequency Range | 9.84 - 15GHz |

Mechanical Data

| | |
|---------------|-------|
| Weight (g) | 50 g |
| Body Material | Brass |

Environmental Specifications

| | |
|-----------------------------|-------------------|
| RoHS Compliant | Yes |
| Operating Temperature Range | -55 °C to +125 °C |