

## BUSTER BULB

---

**ACTION: E27 SCREW**


---

**RANGE: LIGHTING**

---

The World's first designer LED bulb. This bulb consumes just 2W of energy, and has a life span of 35,000 hours. Available in Crystal, Gold or Smoked finish. The resin light pipe at the centre of the bulb is where all the magic happens, allowing the bulb to create a subtle ambient light whilst at the same time throw focused spot light onto tables & surfaces below. The bulb fits in any E27 screw light fitting, but looks especially great when teamed up with our Heavy Metal or Hooked lighting ranges.



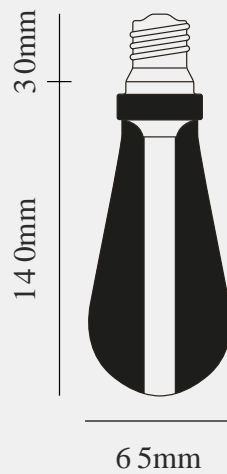

#### SPECIFICATIONS

Buster Bulb: 2W Non-dimmable  
Supply: 100-240 V AC  
Frequency: 50/60 Hz  
Current: 18 mA  
Power Factor: 0.8  
Lifetime\*: 35,000 hrs  
Weight: 110 g  
Luminous Flux: Crystal max 115, Gold max 95, Smoked max 70.  
CCT: Crystal 2600 K, Gold 2500 K, Smoked 2600 K.  
CRI: Crystal 83, Gold 80, Smoked 83.

Buster Bulb: 2W Dimmable  
Supply: 220-240 V AC  
Frequency: 50/60 Hz  
Current: 18 mA  
Power Factor: 0.8  
Lifetime\*: 35,000 hrs  
Weight: 110 g  
Luminous Flux: Crystal max 100, Gold max 90, Smoked max 60.  
CCT: Crystal 2600 K, Gold 2500 K, Smoked 2600 K.  
CRI: Crystal 82, Gold 80, Smoked 84.

#### FINISH & SKU NUMBERS

sku:	finish:	size:
BB-TD-E27-ND-SM-B	● smoked	
BB-TD-E27-ND-GO-B	● gold	
BB-TD-E27-ND-CR-B	● crystal	
BB-TD-E27-D-SM-C	● smoked	
BB-TD-E27-D-GO-C	● gold	
RBBD-093501	● smoked	
RBBD-133500	● gold	
RBBD-123499	● crystal	
GBBD-093504	● smoked	
GBBD-133503	● gold	
GBBD-123502	● crystal	

#### INCLUDED

1 x Buster Bulb

#### PLEASE NOTE

Buster Bulb: 2W Non-dimmable  
The non-dimmable LED BULB is only compatible with on/off switches. If you are looking to use this product in conjunction with a smart or home automation system, please refer to the system manufactures guidance to check compatibility. Our bulbs are mains operated at 240V AC. To avoid disappointment, please ensure a compatible smart module is fitted before purchase. CE and UKCA marked.\*\*

Buster Bulb: 2W Dimmable  
The dimmable LED BUSTER BULB requires a LED-compatible dimmer switch, like the Buster + Punch Premium dimmer switch. They can also be used with on/off switches.  
If you are looking to use this product in conjunction with a smart or home automation system, please refer to the system manufactures guidance to check compatibility. Our bulbs are mains operated at 240VAC. To avoid disappointment, please ensure a compatible smart module is fitted before purchase. CE marked.\*\*

\*This product is specifically designed and developed for domestic use in normal conditions and operation only. The lifetime mentioned on the packaging is an average only. This product comes with 2 years warranty.

\*\*Official data document can be supplied upon request.

**CARE INSTRUCTIONS**

---

Wipe with a dry, lint-free cloth with no loose hairs, avoid using any chemicals. Ensure the bulb is switched off and cold before cleaning.