

RETRACTIVE TOGGLE MODULE / 2 WAY

ACTION: TOGGLE MODULE

RANGE: ELECTRICITY MODULES

A retractive / momentary / push-to-make toggle switch with a sprung return for use with smart-enabled home systems. Combine with a modular Buster + Punch wall plate and finish with one of our detail kits in the knurled and finish of your choice to create a future-proof switch – customised by you and engineered to perfection by us.



Pair with a B+P Multipoint Dimmer to dim lights from multiple locations - short press to switch lights ON/OFF. Press and hold to dim up and down. 250VAC / 10AX max. Multiple location control and dimming. Not compatible with regular 2 or 3-way switching, or standard circuit installations. Compatible with a range of 3rd party smart systems and in-line modules, see tech spec for more information. If in doubt, always consult a licensed electrician.



17.2 mm

23 mm

45 mm

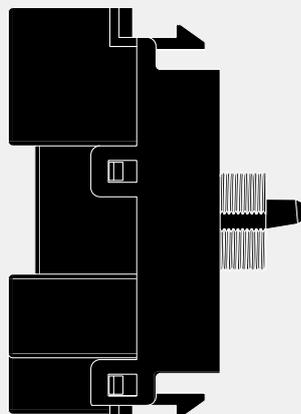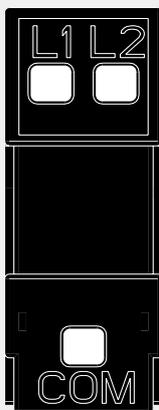

SPECIFICATIONS

Style: On/Off Retractive Toggle Switch
Switching: Retractive / Momentary / Contact Closure
Input: 220-250VAC
Load: 10AX
Certified for use in Europe and Russia:
CE / EAC
Certification: EN 60669

For use with Buster + Punch multipoint dimmers and retractive dimming circuits, to control dimming level from up to 10 locations. Short press to switch lights ON/OFF. Press and hold to dim up and down.
For use with Buster + Punch EU modular electricity plates.
Compatible with smart home systems and in-line modules that accept momentary/contact closure switch inputs.
Not compatible with standard wiring and standard 1-way, 2-way and 3-way wiring accessories.
Not suitable for motors, fans or any other type of large inductive load.
Make sure to consider the inrush current load on the circuit when specifying this module (10AX max.).

Testing Includes:
Endurance - 12,000 cycles @ 100% max load
Resistance to Heat - 125C
Dielectric Voltage Withstand - 2000V & 3000V

FINISH & SKU NUMBERS

finish:

size:

INCLUDED

1 x Retractive Toggle Module

PLEASE NOTE

DISCLAIMER: Always consult a trade professional when installing this product. Buster + Punch is not responsible for the usage or feasibility of installation requirements. This product is not suitable for damp or wet environments.

CARE INSTRUCTIONS

Wipe with a dry lint free cloth with no loose hairs, avoid using any chemicals. Please note that finishes may age naturally with time and regular use.