

**1G DIMMER / 250W
MULTIPOINT LED /
LINEAR / WITH**


ACTION: DIMMER SWITCH

KNURL: LINEAR

RANGE: DIMMER SWITCHES

A solid metal dimmer switch with our latest linear knurling. The switch is finished with a solid metal plate and torx screws. Available in five different finishes, they can be used in combination with our matching toggle switches, sockets and USB outlets.



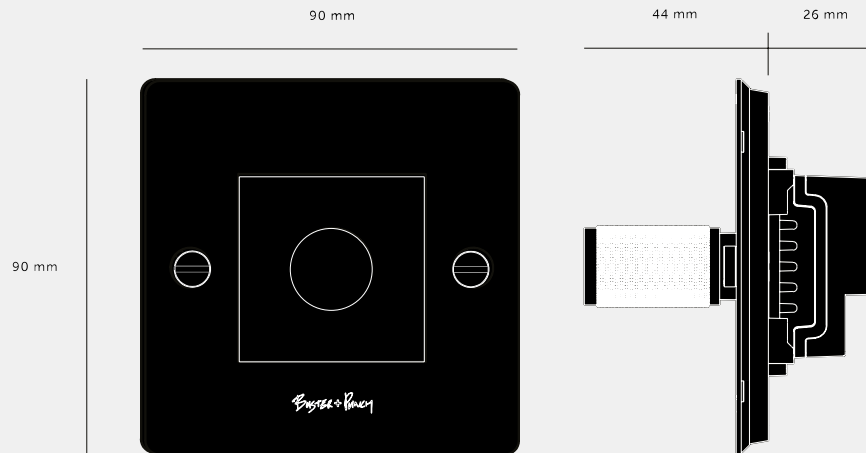

SPECIFICATIONS

Solid metal switch plate with one multipoint dimmer, in our signature white, steel, brass, smoked bronze and black finishes.

Module: CDM-142038

Style: Push On / Off Rotary Dimmer

Switching: Multi-location dimming using retractive switches

Input: 240VAC

Dimming Type: Auto-detect trailing edge and leading edge (with manual override)

Load: 10-350W - Incandescent / 3-250W - LED

Certified for use in UK, Europe and Russia: UKCA / CE / EAC

Certification: EN 60669-2-1

For use with retractive switches on retractive dimming circuits, to control dimming from multiple locations.

Not compatible with standard wiring and standard 1-way, 2-way and 3-way wiring accessories.

Not suitable for motors, fans or any other type of large inductive load.

The dimmer switch incorporates a soft-start feature, which may result in a 1-2 second delay before full illumination to reduce inrush current and extend lamp life.

This module is custom to Buster + Punch and works only with our Cross and Linear knurled dimmer knobs.

note: rotary action includes a soft, audible ticking feedback during adjustment.

Compatible with European standard electricity backboxes. Backbox must be flush mounted.

For indoor use only.

This piece features a 6.5mm shadow gap when installed.

FINISH & SKU NUMBERS

sku:	finish:	size:
CDR-024176	● black	1G
CDR-054177	● brass	1G
CDR-454178	● smoked bronze	1G
CDR-074179	● steel	1G
CDR-144180	● white	1G

INCLUDED

- 1 x Wall Plate
- 1 x Dimmer Module
- 1 x Detail Kit
- 1 x Torx Cap Kit

PLEASE NOTE

DISCLAIMER: Always consult a trade professional when installing this product. Buster + Punch is not responsible for the usage or feasibility of installation requirements. This product is not suitable for damp or wet environments.

CARE INSTRUCTIONS

Wipe with a dry lint free cloth with no loose hairs, avoid using any chemicals. Please note that finishes may age naturally with time and regular use.