



Borealis 6ft Twin

6ft Twin, LED Batten

Features

IK Rating	IK06
IP Rating	IP20
CSP Switchable	Single CCT
UGR	26
Sensor Option	On-Off Microwave sensor & daylight switching available
Dimmable Option	Yes (DALI-2, 0-10V)
LED Lifetime	L70 54,000h
Colour Rendering Index	CRI>80
Colour Consistency	SDCM6
Emergency Option	Yes, Manual and DALI-2 Test

Installation information

Install Connector Type	Loop in / Loop out
Inrush Current	20A 0,2ms
Construction Material	Steel body, white powder coating PC opal diffuser
Weight	2.19Kg, EM Version: 2.45Kg
Ambient Temperature Range	-20°C - 40°C
SELV	Yes
UK Building Regulations	Part P
Electric Class (1, 2, 3)	1

Photometrics @ 25°C

Product code	Finish	Feature I	Feature II	Feature III	W	Colour	Beam	lm	lm/W	lx @ 1m	EM
BT6TS40	White	70W Non-Dim	No sensor	Non emergency	70W	4000K	120°	8680	124	2355	-
BT6TS40EM	White	70W Non-Dim	No sensor	Emergency	70W	4000K	120°	8680	124	2355	250
BT6TD40	White	DALI-2 / PUSH-DIM	No sensor	Non emergency	70W	4000K	120°	8680	124	2355	-
BT6TD40EM	White	DALI-2 / PUSH-DIM	No sensor	Emergency	70W	4000K	120°	8680	124	2355	250
BT6TV40	White	1-10V	No sensor	Non emergency	70W	4000K	120°	8680	124	2355	-

Energy rating is a reflection of the LED light source.

Wiring information

Cable Required for Connector	H05RN-F cable diameter 4 - 10mm, max conductor size 3x 1.5mm ²
Type of Wiring Required	Parallel

Accessories

BTSK1	Suspension Kit - 2 steel wires, with holders.	Sold Separately
PIRBOLT	On-off PIR sensor with daylight switch	Sold Separately
PIRBOLTDIM	Dimming PIR Sensor with Lux Level switch 0-2000lx	Sold Separately
PIRBOLTDIMR	Remote control for use with PIRBOLTDIM	Sold Separately
EMBOLTMOPEN	Bolt-on emg conversion pack, Man-Test, 200lm	Sold Separately
EMBOLTMCOR	Bolt-on emg conversion pack, Man-Test, 200lm	Sold Separately
EMBOLTSOPEN	Bolt-on emg conversion pack, Self-Test, 200lm	Sold Separately



01604 495 151
collingwoodlighting.com

collingwoodled
 /collingwoodlighting
 collingwoodlighting

Guarantee

5 years (product), 2 years (emerg battery)


Features & benefits

High efficacy of 124lm/W
Suspended gear tray for easy installation
Emergency option available
Multiple fixing points and several wiring options
Flicker free
Ideal for sheds, garages and warehouses
MW sensing range adjustable, up to 4m high, 8m diameter
Diffuser is released by side buttons and is easily accessible through loop-in/loop-out terminals

Light source
energy efficiency:



Beam angle: 120°

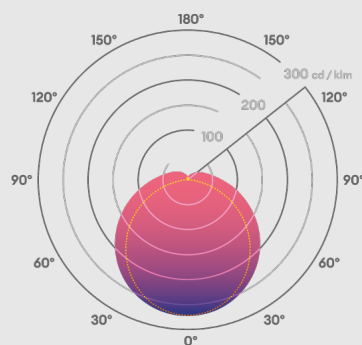

1828mm



70mm

