
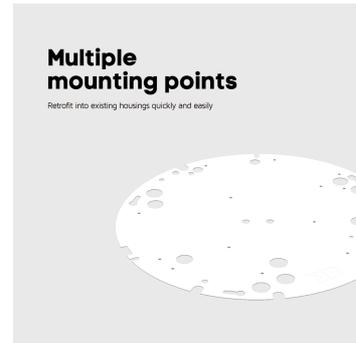


DUXFORD RETROFIT GEAR TRAY 4000K 16W MICROWAVE SENSOR

NET-33-06-07

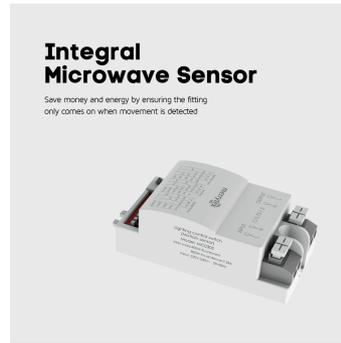

Features & Benefits

- Detection range from 2m to 10m
- Hold time from 5 seconds to 10 minutes
- Daylight threshold
- Corridor function 0% or 10%
- Multiple mounting points for retro fit into existing housings
- Quick release Gear Trays

Key Data

| | |
|---------------------------|---------------|
| Power | 16W |
| Luminous Flux | 1550lm |
| Colour Temperature | 4000K |
| Dimensions | Ø261 x 23.6mm |
| Warranty | 3 Years |

NET LED Lighting

Buckingway Business Park, 300 Anderson Road,
Swavesey, Cambridge, CB24 4UQ


T: 01223 851505 | sales@netled.co.uk | www.netled.co.uk



ORDER BY 6PM
FOR NEXT DAY DELIVERY

Technical Specifications

| | |
|----------------------------|------------------|
| Input Voltage (AC) | 220-240V |
| Power Factor | >0.9 |
| Luminaire Efficacy | 118lm/W |
| LED Manufacturer | Jingrui |
| LED Type | SMD 2835 |
| No. of LEDs | 52 |
| Driver Manufacturer | Merrytek |
| Driver Output Voltage (DC) | 36-42V |
| Total Circuit Power (W) | 16W +/- 1.5W |
| Electrical Class | 1 |
| Colour Rendering | >80 CRI |
| Lamp Viewing Angle | 115° |
| Dimmable | No |
| Operating Temp. | -15°C to +45°C |
| Lifespan LM80 | 35,000 Hours |
| UGR Rating | More than 19 |
| Weight | 0.54Kg |
| Manufacturer | NET LED Lighting |
| Sensor IP Rating | IP20 |
| Standby Dimming Level | 0% / 10% |
| Corridor Function | Yes |

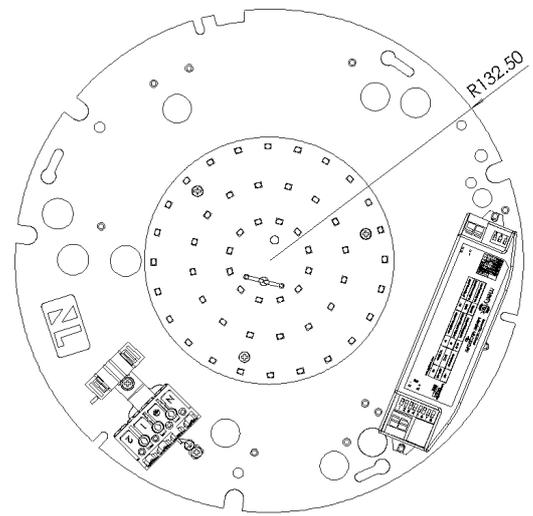

Other Options

| Description | |
|--------------|---|
| NET-33-06-03 | Duxford Retrofit Gear Tray 4000K 16W Standard |
| NET-33-06-05 | Duxford Retrofit Gear Tray 4000K 16W Emergency |
| NET-33-06-07 | Duxford Retrofit Gear Tray 4000K 16W Microwave Sensor |
| NET-33-06-09 | Duxford Retrofit Gear Tray 4000K 16W Microwave Sensor Emergency |

NET LED Lighting

Buckingham Business Park, 300 Anderson Road,
Swavesey, Cambridge, CB24 4UQ



ORDER BY 6PM
FOR NEXT DAY DELIVERY