


DUXFORD RETROFIT GEAR TRAY 4000K 16W MICROWAVE SENSOR EMERGENCY

NET-33-06-09

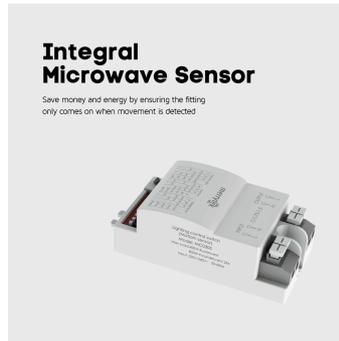

Features & Benefits

- Maintained or non-maintained Emergency operation
- Detection range from 2m to 10m
- Hold time from 5 seconds to 10 minutes
- Daylight threshold
- Corridor function 0% or 10%
- Multiple mounting points for retro fit into existing housings

Key Data

Power	16W
Luminous Flux	1550lm
Colour Temperature	4000K
Dimensions	Ø261 x 23.6mm
Warranty	3 Years

NET LED Lighting

Buckingway Business Park, 300 Anderson Road,
Swavesey, Cambridge, CB24 4UQ


T: 01223 851505 | sales@netled.co.uk | www.netled.co.uk



ORDER BY 6PM
FOR NEXT DAY DELIVERY

Technical Specifications

Input Voltage (AC)	220-240V
Power Factor	>0.9
Luminaire Efficacy	118lm/W
LED Manufacturer	Jingrui
LED Type	SMD 2835
No. of LEDs	52
Driver Manufacturer	Merrytek
Driver Output Voltage (DC)	36-42V
Total Circuit Power (W)	16W +/- 1.5W
Electrical Class	1
Colour Rendering	>80 CRI
Lamp Viewing Angle	115°
Dimmable	No
Operating Temp.	0°C to +45°C
Lifespan LM80	35,000 Hours
UGR Rating	More than 19
Weight	0.54Kg
Manufacturer	NET LED Lighting
Luminous Flux Factor	5%
Self Test	No
Battery Pack	Li-on 3.7V
Emergency Kit	1 Year Warranty
Emergency Operation	>3H
Emergency Pack	Streamer
Sensor IP Rating	IP20
Standby Dimming Level	0% / 10%
Corridor Function	Yes

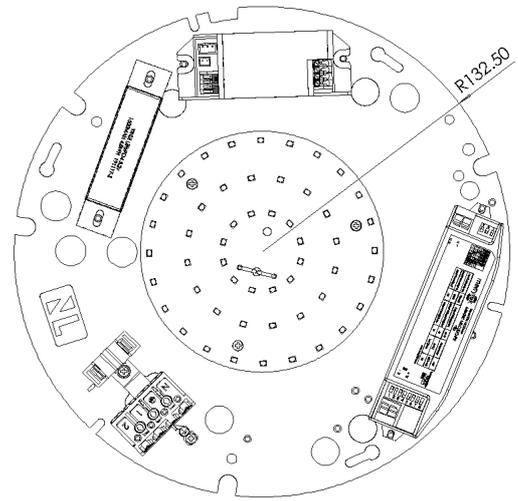

Other Options

Description	
NET-33-06-03	Duxford Retrofit Gear Tray 4000K 16W Standard
NET-33-06-05	Duxford Retrofit Gear Tray 4000K 16W Emergency
NET-33-06-07	Duxford Retrofit Gear Tray 4000K 16W Microwave Sensor
NET-33-06-09	Duxford Retrofit Gear Tray 4000K 16W Microwave Sensor Emergency

NET LED Lighting

Buckingham Business Park, 300 Anderson Road,
Swavesey, Cambridge, CB24 4UQ



ORDER BY 6PM
FOR NEXT DAY DELIVERY