

MANUAL/SELF TEST EMERGENCY SELECTABLE LED CONVERTER 2.5W

NET-50-12-10



Features & Benefits

- Choose between Self Test Emergency and manual 3H Emergency operation
- Compatible with LED Tubes

Key Data

Power	2.5W
Dimensions	164 x 30 x 22mm
Warranty	3 Years

NET LED Lighting

Buckingham Business Park, 300 Anderson Road,
Swavesey, Cambridge, CB24 4UQ


T: 01223 851505 | sales@netled.co.uk | www.netled.co.uk



ORDER BY 6PM
FOR NEXT DAY DELIVERY

Technical Specifications

Input Voltage (AC)	220-240V
Power Factor	0.5
Driver Output Voltage (DC)	50-300V
Total Circuit Power (W)	2.5W
Operating Temp.	0°C to +60°C
Manufacturer	Cambridge LED
AC Current	220-240V
Hours Maintained	>3H
Output Current	40mA
Output Power	2.5W
Output Voltage	50-300V
Power Frequency	50/60Hz
Recharge Period	>24H
Self Test	Selectable
Housing Colour	White
Housing Material	Polycarbonate
Battery Pack	LiFePO4 3.2V 3.2mAh
Battery Warranty	1 Year
Charge Time	>24H
Emergency Operation	3H or Self Test

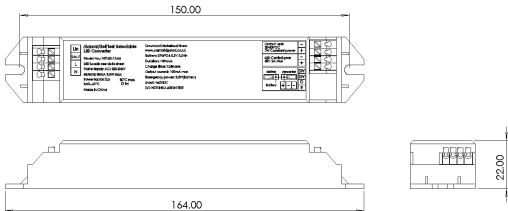

Other Options

Description	
NET-19-33-17	Liteplan DALI Emergency Kit 5W
NET-61-33-01	Foxlux Self Test Emergency Kit 5W
NET-50-12-10	Manual/Self Test Emergency Selectable LED Converter 2.5W
NET-61-33-05	DALI Emergency Kit 3W/6W

NET LED Lighting
Buckingham Business Park, 300 Anderson Road,
Swavesey, Cambridge, CB24 4UQ

 **ORDER BY 6PM**
FOR NEXT DAY DELIVERY