

BUCKDEN SELF TEST EMERGENCY EXIT BOX IP20 3W

NET-61-35-72



Features & Benefits

- Weekly 30 second functional test carried out automatically
- Annual 3 hour duration test carried out automatically
- Viewing distance of 34m
- Maintained or non-maintained Emergency operation
- Wall mount
- Optional Remote Control available

Key Data

Power	3W
Luminous Flux	82lm
Colour Temperature	4000K
IP Rating	IP20
IK Rating	IK07
Dimensions	392 x 41 x 196mm
Warranty	5 Years

Compatible Accessories

NET-61-35-10	Buckden Remote Control for Self Test EM Signage
NET-61-35-82	Buckden LEFT Arrow for Self Test EXIT Box
NET-61-35-83	Buckden RIGHT Arrow for Self Test EXIT Box
NET-61-35-84	Buckden DOWN Arrow for Self Test EXIT Box

NET LED Lighting

Buckingham Business Park, 300 Anderson Road,
Swavesey, Cambridge, CB24 4UQ


T: 01223 851505 | sales@netled.co.uk | www.netled.co.uk



ORDER BY 6PM
FOR NEXT DAY DELIVERY

Technical Specifications

Input Voltage (AC)	220-240V
Power Factor	>0.5
No. of LEDs	16
Driver Manufacturer	Foxlux Emergency Lighting
Total Circuit Power (W)	3W
Electrical Class	1
Operating Temp.	0°C to +40°C
Lifespan LM80	50,000 Hours
Weight	1.08Kg
Manufacturer	Foxlux Emergency Lighting
Maintained	Yes
Self Test	Yes
Housing Colour	White
Housing Material	Steel
Battery Pack	Li-on 3.6V 2.5Ah
Battery Warranty	1 Year
Charge Time	<24H
Discharge Time	>3H

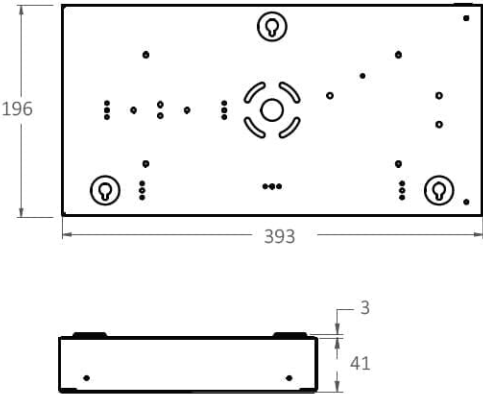

Other Options

Description	
NET-61-35-72	Buckden Self Test Emergency EXIT Box IP20 3W

NET LED Lighting
Buckingway Business Park, 300 Anderson Road,
Swavesey, Cambridge, CB24 4UQ

T: 01223 851505 | sales@netled.co.uk | www.netled.co.uk

 **ORDER BY 6PM**
FOR NEXT DAY DELIVERY