



CCT switchable between 3000K, 4000K & 5700K



Wattage Switchable



Suspended gear tray for easy installation



BOREALIS VERSA

CCT Colour & Wattage Switchable Batten with plug-in Versabox accessories

FEATURES

IP rating	IP20
IK rating	IK06
CSP Switchable	Switchable CCT
Sensor Option	Versabox, see accessories
Dimmable Option	Yes (DALI-2, 0-10V, PUSH-DIM)
LED Lifetime	L70 100,000h
Colour Rendering Index	CRI>80
Colour Consistency	SDCM6
Emergency Option	Yes, Manual, Self and DALI-2 Test
LED Photobiological Risk Group	RG0 - No Risk

INSTALLATION INFORMATION

Input	220-240V AC
Maximum Ambient Temperature	-20°C - 40°C
Weight	4ft: 1.47kg, 5ft: 1.83kg, 6ft: 2.14kg
Inrush Current	2.36A 0.36ms
Construction Material	Steel Housing, PC Opal Diffuser RAL9003
SELV	No
Electric Class (1, 2, 3)	1
Install Connector Type	Removeable, moveable, loop in/out
UK Building Regulations	Part L
Mounting Options	Ceiling, wall & suspended
Power Factor	0.9

WARRANTY

Warranty	7 years
Battery Warranty	5 years
On-Site Warranty	2 years


FEATURES & BENEFITS

- Versabox plug and play kit range to accommodate project requirements
- Multiple fixing points and several wiring options
- Ideal for sheds, garages and warehouses
- Diffuser is released by side buttons
- Self and Manual emergency option available
- DALI-2, 0-10V and DALI Emergency option available to order contact CWD

Photometrics @ 25°C

Product Code	Finish	Type	Beam	W	Colour	lm	lm/W	EM lm	Energy
BT4VMEM	White	On-Off Step-Dim Microwave Manual Test Emergency	120°	37W	4000K	5550	154	240	
					5700K	5550	154	240	
					3000K	3920	140	230	
BT5VMEM	White	On-Off Step-Dim Microwave Manual Test Emergency	120°	28W	4000K	4200	150	230	
					5700K	4200	150	230	
					3000K	5320	140	230	
				38W	4000K	5700	150	230	
					5700K	5700	150	230	
					3000K	6720	140	230	
				48W	4000K	7200	150	230	
					5700K	7200	150	230	
					3000K	7840	140	230	
				56W	4000K	8400	150	230	
					5700K	8400	150	230	
					3000K	7840	140	230	
BT6VMEM	White	On-Off Step-Dim Microwave Manual Test Emergency	120°	33W	3000K	4690	142	200	
					4000K	5025	152	200	
					5700K	5025	152	200	
				45W	3000K	6300	140	200	
					4000K	6750	150	200	
					5700K	6750	150	200	
				56W	3000K	7840	140	200	
					4000K	8400	150	200	
					5700K	8400	150	200	

BEAM ANGLE: 120°

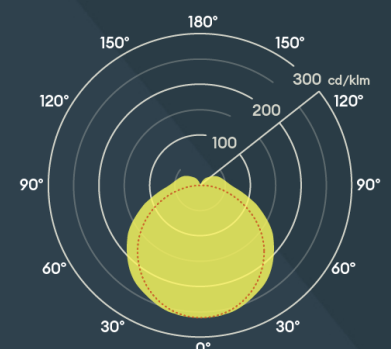

1233mm (4ft)



1533mm (5ft)



1833mm (6ft)



77mm
73mm





LIGHTING INNOVATION

Bringing further versatility to the commercial offering at Collingwood, our range of Borealis Versa provides the ultimate batten with a variety of kits, from microwave sensors to manual test emergencies, DALI emergencies, and self-test emergencies. Also available in 0-10V, DALI-2 Dimmable, or On/Off to suit a project. The streamlined linear fixture, available in three lengths, allows you to create a uniform installation of perfectly distributed light. Designed with the installer in mind, this range is quick and easy to fit, keeping use of tools to a minimum. It also provides various wiring options, particularly useful in retrofit applications.

Model	Color	Control	Beam Angle	Power (W)	3000K (lm)	4000K (lm)	5000K (lm)	5700K (lm)	Kit							
BT4VMES	White	On-Off Step-Dim Microwave Self Test Emergency	120°	67W	3000K	9380	140	200								
					4000K	10050	150	200								
					18W	3000K	2590	144	240							
						4000K	2775	154	240							
					25W	3000K	3500	144	240							
						4000K	3750	154	240							
					31W	3000K	4340	144	240							
						4000K	4650	154	240							
					37W	3000K	5180	144	240							
						4000K	5550	154	240							
					56W	3000K	7840	140	230							
						4000K	8400	150	230							
BT5VMES	White	On-Off Step-Dim Microwave Self Test Emergency	120°	28W	3000K	3920	140	230								
					4000K	4200	150	230								
					38W	3000K	5320	140	230							
						4000K	5700	150	230							
					48W	3000K	6720	140	230							
						4000K	7200	150	230							
					56W	3000K	7840	140	230							
						4000K	8400	150	230							
				BT6VMES	White	On-Off Step-Dim Microwave Self Test Emergency	120°	33W	3000K		4690	142	200			
									4000K		5025	152	200			
									45W		3000K	6300	140	200		
											4000K	6750	150	200		
	56W	3000K	7840					140	200							
		4000K	8400					150	200							
	67W	3000K	9380					140	200							
		4000K	10050					150	200							
BT4VES	White	0-10V Self Test Emergency	120°					18W	3000K	2590	144	240				
									4000K	2775	154	240				
									37W	3000K	5180	144	240			
										4000K	5550	154	240			
				BT5VES	White	0-10V Self Test Emergency	120°	28W	3000K	3920	140	230				
									4000K	4200	150	230				
									56W	3000K	7840	140	230			
										4000K	8400	150	230			
									33W	3000K	4690	142	200			
										4000K	5025	152	200			
									37W	3000K	5180	144	240			
										4000K	5550	154	240			
	56W	3000K	7840					140	230							
		4000K	8400					150	230							
	67W	3000K	9380					140	200							
		4000K	10050					150	200							

*Replace 'N' at the end of the part code with: 'NEM' for Manual-test Emergency models | 'D' for DALI-2/PUSH DIM | 'V' for 0-10V | Plug in kits also available as separate accessories. Energy rating is a reflection of the LED light source.

WIRING INFORMATION

	3000K	4000K	10050	150	200
Cable Required for Connector	N/A	N/A	N/A	N/A	N/A
Type of Wiring Required	Parallel	Parallel	Parallel	Parallel	Parallel

ACCESSORIES

ACKITMANEM	Manual Test Emergency plug-in Versabox	Sold Separately
ACKITSELFEM	Self Test Emergency plug-in Versabox	Sold Separately
ACKITMWS	Microwave Sensor on/off Plug-in Kit	Sold Separately
ACKITMWSDIM	Microwave Sensor Dim plug-in Versabox (requires 0-10V driver)	Sold Separately
ACREMOTEMWS	Remote for Microwave Sensor	Sold Separately



COLLINGWOOD
LIGHTING

LIGHTING INNOVATION

Bringing further versatility to the commercial offering at Collingwood, our range of Borealis Versa provides the ultimate batten with a variety of kits, from microwave sensors to manual test emergencies, DALI emergencies, and self-test emergencies. Also available in 0-10V, DALI-2 Dimmable, or On/Off to suit a project. The streamlined linear fixture, available in three lengths, allows you to create a uniform installation of perfectly distributed light. Designed with the installer in mind, this range is quick and easy to fit, keeping use of tools to a minimum. It also provides various wiring options, particularly useful in retrofit applications.