



# Domino Black

Ultra-low Glare 600x600 Architectural Panel

## Features

<b>IK Rating</b>	IK08
<b>IP Rating</b>	IP40
<b>CSP Switchable</b>	Single CCT
<b>UGR</b>	16
<b>Sensor Option</b>	On Request
<b>Dimmable Option</b>	Yes (DALI-2, 0-10V, PUSH-DIM)
<b>LED Lifetime</b>	L90 51,000h
<b>Colour Rendering Index</b>	CRI>80
<b>Colour Consistency</b>	SDCM3
<b>Emergency Option</b>	Yes, using converter

## Installation information

<b>Install Connector Type</b>	2 part first fit connector
<b>Insulation Coverable</b>	Luminaire: Rolled and blown insulation Driver: no
<b>UK Bathroom Zone</b>	2
<b>Inrush Current</b>	28A <50ms
<b>Construction Material</b>	Steel Housing, Polycarbonate Lens
<b>Weight</b>	3.8kg
<b>Ambient Temperature Range</b>	-20°C - 40°C
<b>SELV</b>	Yes
<b>UK Building Regulations</b>	Part P & L
<b>Electric Class (1, 2, 3)</b>	2

## Photometrics @ 25°C

Product code	Finish	Feature I	Feature II	W	Colour	Beam	lm	lm/W	EM
DMB66X4K	Black RAL9004	Dimmable	Use driver PS6501100MA	27W	4000K	75°	4350	161	See Accessories
DMB66X4K	Black RAL9004	Dimmable	Use driver PS6501100MA	27W		75°			See Accessories
DMB66N4K	Black RAL9004	Non-Dimmable	Driver included with lumen output switch	22W	4000K	75°	3550	161	See Accessories
DMB66N4K	Black RAL9004	Non-Dimmable	Driver included with lumen output switch	24W	4000K	75°	3850	160	See Accessories

Energy rating is a reflection of the LED light source.

## Wiring information

<b>Cable / Flying Lead</b>	0.75-1.5mm <sup>2</sup>
<b>Type of Wiring Required</b>	Parallel

## Accessories

<b>PS6501100MA</b>	one4all driver DALI-2, Push-dim, 0-10V, 10V PWM	Sold Separately
<b>EUP30TIHMC0</b>	Driver, 30W Panel, TRIAC Mains Dim	Sold Separately
<b>DRV3001050</b>	42W CC Driver, IP20, 300-1050mA, Class II SELV	Sold Separately
<b>LEDEP10</b>	Emergency converter, Self-test, 220lm	Sold Separately
<b>LEDEP09DA</b>	Emergency converter, DALI Addressable, 220lm	Sold Separately
<b>EMRWMAN</b>	Salvus Route White, Man-Test, 120(O) or 130(C) lm	Sold Separately
<b>EMRWST</b>	Salvus Route White, Self Test, 120lm(O) or 130lm(C)	Sold Separately



collingwood

01604 495 151  
collingwoodlighting.com

collingwoodled

/collingwoodlighting

collingwoodlighting

## Guarantee

5 years (product), 3 years (emg battery), 2 years (on-site)

## Features & benefits

UGR16 for office, classroom and retail application

Wattage switchable between 22W, 24W, 25W & 27W

Energy efficient up to 164 lm/W

Perfect for office, classroom and retail application

Differentiate the look of your space with a high-quality aesthetic

51,000 hours L90 lifetime

High impact rating of IK08


Security cable supplied

RG0 (Risk Exempt) Photo-biological Risk

Light source energy efficiency:



Beam angle: 75°

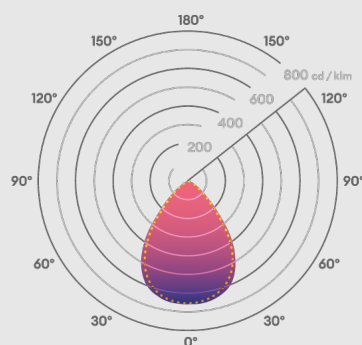

600mm

18mm

