




Colour Switchable between
3000K-3500K-4000K



Contributes to a UGR19
lighting design



Energy efficient up to
130lm/W

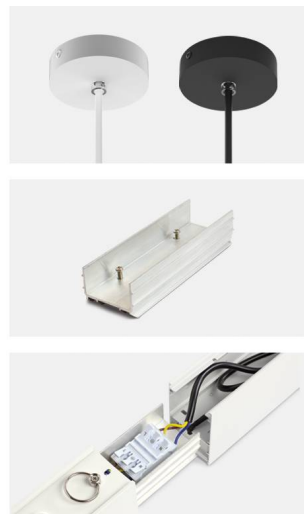

LINEAR CELL 4FT

Low glare suspended light line luminaire

FEATURES

IP rating	IP20
IK rating	IK06
CSP Switchable	Switchable CCT
UGR	UGR19
Sensor Option	No
Dimmable Option	Yes (DALI-2, PUSH-DIM)
LED Lifetime	L80 60,000h
Colour Rendering Index	CRI>80
Colour Consistency	SDCM6
Emergency Option	Yes, Self-Test

INSTALLATION INFORMATION

Input	220-240V AC
Maximum Ambient Temperature	-20°C - 50°C
Weight	1.5kg
Inrush Current	10A 0.088ms
Construction Material	Aluminium housing, ABS reflector and Microprism lens
Electric Class (1, 2, 3)	I
Install Connector Type	Push-fit terminal, loop-in/loop-out
Mounting Options	Ceiling & suspended
Power Factor	0.95

Photometrics @ 25°C

Product Code	Finish	Type	Beam	W	Colour	lm	lm/W	lx@1m	EM lm	Energy
LCLWID	White RAL9003	DALI-2 dimmable	75°	38W	3000K	4600	120	4070	-	
					3500K	5000	130	4375	-	
					4000K	4800	126	4300	-	
LCLWIDEM	White RAL9003	Emergency DALI-2 dimmable	75°	38W	3000K	4600	120	4070	300	
					3500K	5000	130	4375	325	
					4000K	4800	126	4300	315	
LCLBSID	Matt black RAL9017	DALI-2 dimmable	70°	38W	3000K	4600	120	4070	-	
					3500K	5000	130	4375	-	
					4000K	4800	126	4300	-	
LCLBSIDEM	Matt black RAL9017	Emergency DALI-2 dimmable	70°	38W	3000K	4600	120	4070	300	
					3500K	5000	130	4375	325	
					4000K	4800	126	4300	315	

Energy rating is a reflection of the LED light source.

WIRING INFORMATION

Cable / Flying Lead	0.75-2.5mm ²
Type of Wiring Required	Parallel

ACCESSORIES

LCLWIDCRKIT	White Ceiling Rose Kit, DALI/Push	Sold Separately
LCLBSIDCRKIT	Black Ceiling Rose Kit, DALI/Push	Sold Separately
LCLCONKIT	Light Line Connect Kit	Sold Separately

WARRANTY

Warranty	5 years
Battery Warranty	5 years
On-Site Warranty	2 years

FEATURES & BENEFITS

On-Off or Dimmable as standard

Must be sold with either accessory LCLBSIDCRKIT=Black / LCLWIDCRKIT=White to provide a decorative ceiling rose for the power cable

Install as an individual luminaire or create a continuous run lightline (up to 20 luminaires) using accessory LCLCONKIT

DALI-2 driver is switchable to enable lower lumen outputs

