

4 4 Years
Product Warranty
UK Only

2 2 Years
On-Site Warranty
Main-land UK Only

Doxa

Kosnic 

06872 DOX0103UP

Doxa Emergency exit sign 3W Manual test Up Arrow

- 5 mounting positions
- Maintained or non-maintained operation
- Integrated mounting clips
- Different exit sign plates available
- Available in self-test version

Overview

The Doxa LED emergency exit sign is a self-contained, multi-purpose, maintained or non-maintained 3-hour emergency solution. The fitting is adaptable to be surface mounted in multiple positions, suspended or recessed mounted when used with the additional suspension kit or recessed kit. Supplied with upward arrow exit sign.




General Information

IP Rating	IP20
Protection	Class II
Rating	
Installation Area	Internal
UEM/EME Protection	Class II

Compliance

LVD	EN 60598-1:2024, EN 60598-2-22:2022, EN 62031:2020, EN 62471:2008, EN 62493:2015+A1:2022
EMC	EN 55015:2019+A11:2020, EN 61000-3-2:2019+A1:2021, EN 61000-3-3:2013+A1:2019+A2:2021, EN 61547:2023
Others	UKCA, CE, RoHS, WEEE, REACH

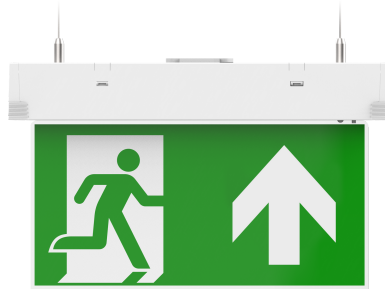

Technical Summary

Product Code	DOX0103UP
Lumens Output Maximum	30 lm
Maximum Efficiency	50 lm/W
Emergency Luminous Flux	30 lm
Maintained Luminous Flux	50 lm
Weight	0.55Kg
Dimensions (L x W x D) (mm)	283x169x3
UEM/EME Battery Life	4 y
UEM/EME Input Voltage	220-240Vac 50/60Hz
UEM/EME Ambient Temperature Range	0°C to 40°C
UEM/EME Power Factor	0.43
Emergency Modes	Maintained or Non-maintained
UEM/EME Test Function	Manual
UEM/EME CCT	6,500 K
UEM/EME Input Power (Max)	3 W
UEM/EME Protection	Class II
UEM/EME Weight	0.342 kg
UEM/EME Dimensions (L x W x D) (mm)	169x252x34
UEM/EME Emergency Operation Test	Manual

Tel: 01635 523 713

Email: sales@kosnic.com

Kosnic.com



Kosnic Lighting KosnicUK KosnicLightingUK

4 4 Years
Product Warranty
UK Only

2 2 Years
On-Site Warranty
Main-land UK Only

Doxa

06872 DOX0103UP

Accessories

Product Code	Description	Type
KBAT2600LI1	Li-ion Battery Pack, 2600mAh for self test versions of Manot, Mulu, Belum, Kalem, Nitro, Nitro surface, Doxa	Battery
KBAT2000LI1	Li-ion battery 3.7V 2000mAh for self test DD EME	Battery
DOX-ESLR	Doxa, exit sign Left/Right	Sign


Overview

The Doxa LED emergency exit sign is a self-contained, multi-purpose, maintained or non-maintained 3-hour emergency solution. The fitting is adaptable to be surface mounted in multiple positions, suspended or recessed mounted when used with the additional suspension kit or recessed kit. Supplied with upward arrow exit sign.



General Information

IP Rating	IP20
Protection Rating	Class II
Installation Area	Internal
UEM/EME Protection	Class II

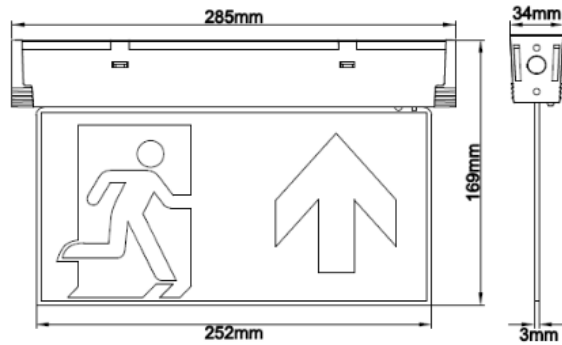

Tel: 01635 523 713

Email: sales@kosnic.com

Kosnic.com



Kosnic Lighting KosnicUK KosnicLightingUK KosnicUK