5 Years
Product Warranty
UK Only


Casambi Driver

Kosnic
LIGHTING • SIMPLY BETTER

08054 DRC42/CSB

Dimmable Driver: Casambi dimmable driver 42W Bluetooth &

- Flicker free for entire dimming range
- Configurable output current with DIP switches
- Stand-by power below 0.5W

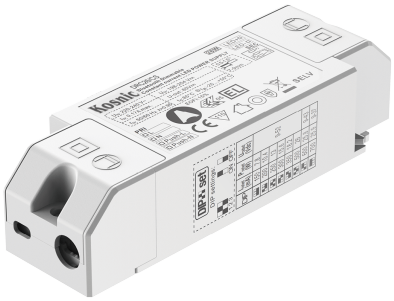

Overview

Our Casambi Bluetooth and push button dimmable driver allows you to achieve flicker free dimming without costing you in efficiency. It allows for configurable output current with the built-in DIP switches.

Technical Summary	
Product Code	DRC42/CSB
Driver Maximum Power (W)	42 W
Driver Output Current (mA)	700-1050
Driver Power Factor	0.95
Dimensions (L x W x D) (mm)	131x43x30

General Information

Installation Area	Internal

Compliance

LVD	EN 60598-1:2024, EN 61347-1:2015+A1:2021, EN 61347-2-13:2014+A1:2017, EN 61493:2015
EMC	EN 55015:2019+A11:2020, EN 61000-3-2:2019+A1:2021, EN 61000-3-3:2013+A1:2019+A2:2021, EN 61547:2023
Others	UKCA, CE, RoHS, WEEE

Tel: 01635 523 713

Email: sales@kosnic.com

Kosnic.com

Kosnic Lighting KosnicUK KosnicLightingUK

5 Years
Product Warranty
UK Only


Casambi Driver

Kosnic
LIGHTING • SIMPLY BETTER

08054 DRC42/CSB

Overview

Our Casambi Bluetooth and push button dimmable driver allows you to achieve flicker free dimming without costing you in efficiency. It allows for configurable output current with the built-in DIP switches.

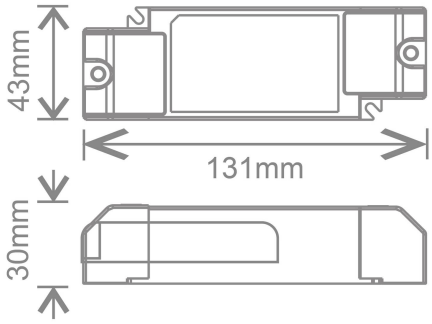


General Information

Installation Area	Internal

Output Parameters		
Output Current	Output Voltage	Max. Load
700 mA	9-52 Vdc	36.4 W
750 mA	9-52 Vdc	39 W
800 mA	9-52 Vdc	41.6 W
850 mA	9-49 Vdc	41.7 W
900 mA	9-47 Vdc	42.3 W
950 mA	9-44 Vdc	41.8 W
1000 mA	9-42 Vdc	42 W
1050 mA	9-40 Vdc	42 W

Wiring Diagrams

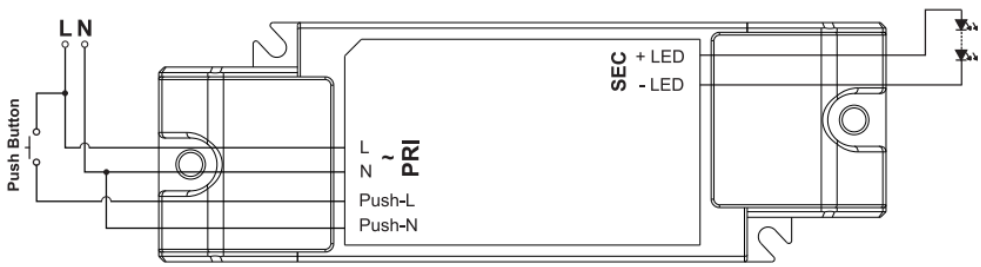

Tel: 01635 523 713
Email: sales@kosnic.com
Kosnic.com
Kosnic Lighting KosnicUK KosnicLightingUK KosnicUK