7 Years
Product Warranty
UK Only

2 Years
On-Site Warranty
Main-land UK Only


Belum

Kosnic
LIGHTING • SIMPLY BETTER

08813 BEL0105/SST

Belum Duo Emergency exit sign box Manual & Self-test 6500K

- Select manual or self-test mode via the internal dual-mode DIP switch
- Automatic self-test conforming to BS-EN-62034
- To adjust green LED indicator brightness, press and hold the test button for more than 2 seconds
- Hidden slot on the frame for attaching exit sign film
- Maintained and non-maintained options
- Emergency lights under the fitting illuminate the doorway
- All legends included

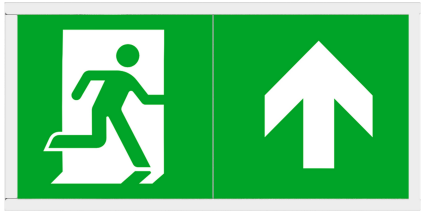





Overview

The Belum LED emergency exit sign is a self-contained, multi-purpose, maintained or non-maintained 3-hour emergency solution. This wall mounted panel has LEDs along the under edge. May be used as a standard emergency luminaire without the exit sign graphic. Supplied with Upward arrow exit sign. Standard or Self-Test options

IP20

General Information

IP Rating	IP20
Protection Rating	Class I
Installation Area	Internal
UEM/EME Protection	Class I
L80B10 Lifetime (h) @Ta 25 °C	109,000 h

Compliance

LVD	EN 60598-1:2024, EN 60598-2-22:2022, EN 61347-1:2015+A1:2021, EN 61347-2-7:2012+A1:2021, EN 61347-2-13:2014+A1:2017, EN 62031:2020, EN 62493:2015+A1:2022
EMC	EN 55015:2019+A11:2020, EN 61000-3-2:2019+A1:2021, EN 61000-3-3:2013+A1:2019+A2:2021, EN 61547:2023
Others	UKCA, CE, RoHS, WEEE, REACH

Technical Summary	
Product Code	BEL0105/SST
CRI	80
Lumens Output Maximum	100 lm
Maximum Efficiency	70 lm/W
Emergency Luminous Flux	70 lm
Maintained Luminous Flux	70 lm
L80B10 Lifetime (h) @Ta 25 °C	109,000 h
UEM/EME Battery Life	5 y
UEM/EME Input Voltage	220-240Vac 50/60Hz
UEM/EME Ambient Temperature Range	0°C to 50°C
UEM/EME Power Factor	0.5
Emergency Modes	Maintained or Non-maintained
UEM/EME Test Function	Manual & Automatic Self-Test
UEM/EME CCT	6,500 K
UEM/EME Input Power (Max)	5 W
UEM/EME Protection	Class I
UEM/EME Weight	1.08 kg
UEM/EME Dimensions (L x W x D) (mm)	391x194x53
UEM/EME Emergency Operation Test	Automatic test / Manual test

Tel: 01635 523 713

Email: sales@kosnic.com

Kosnic.com

Kosnic Lighting KosnicUK KosnicLightingUK

7 Years
Product Warranty
UK Only

2 Years
On-Site Warranty
Main-land UK Only

Belum

Kosnic
LIGHTING • SIMPLY BETTER

08813 BEL0105/SST


Accessories

Product Code	Description
BATS18LFP1	Battery for DD EME 2, Doxa 2 & EME light 2 in 1,Temp sensor

Overview

The Belum LED emergency exit sign is a self-contained, multi-purpose, maintained or non-maintained 3-hour emergency solution. This wall mounted panel has LEDs along the under edge. May be used as a standard emergency luminaire without the exit sign graphic. Supplied with Upward arrow exit sign. Standard or Self-Test options

IP20

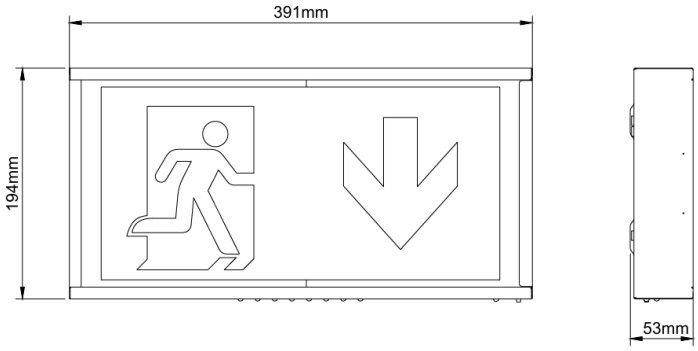

General Information

IP Rating	IP20
Protection Rating	Class I
Installation Area	Internal
UEM/EME Protection	Class I



Tel: 01635 523 713
Email: sales@kosnic.com
Kosnic.com
Kosnic Lighting KosnicUK KosnicLightingUK KosnicUK


7 Years
Product Warranty
UK Only

2 Years
On-Site Warranty
Main-land UK Only

Belum

Kosnic
LIGHTING • SIMPLY BETTER

08813 BEL0105/SST

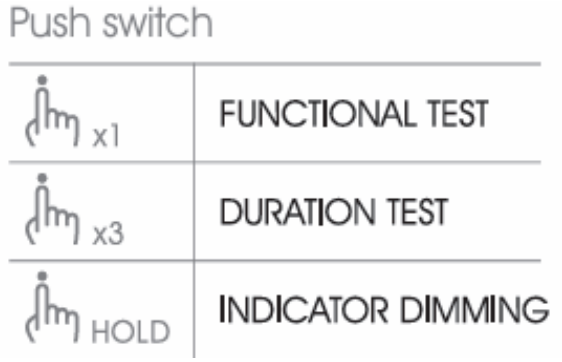

Overview

The Belum LED emergency exit sign is a self-contained, multi-purpose, maintained or non-maintained 3-hour emergency solution. This wall mounted panel has LEDs along the under edge. May be used as a standard emergency luminaire without the exit sign graphic. Supplied with Upward arrow exit sign. Standard or Self-Test options

IP20

General Information

IP Rating	IP20
Protection Rating	Class I
Installation Area	Internal
UEM/EME Protection	Class I

Tel: 01635 523 713

Email: sales@kosnic.com

Kosnic.com

Kosnic Lighting KosnicUK KosnicLightingUK KosnicUK