



# Salvus Route

High Performance Emergency Spot

## Features

IK Rating	IK04
IP Rating	IP20
CSP Switchable	Single CCT
LED Lifetime	L70 50,000h
Colour Rendering Index	CRI>80

## Installation information

Install Connector Type	Integrated terminals, loop-in/loop-out
Cut Out Size	43-44
Inrush Current	3.04A
Construction Material	Polycarbonate
Weight	180g
Ambient Temperature Range	5°C - 45°C
Electric Class (1, 2, 3)	2

## Photometrics @ 25°C

Product code	Finish	Feature I	Feature II	W	Colour	Beam	lm	lx @ 1m	EM
EMRWMAN	White RAL9003	White	Manual Test	1W	6500K	165° / 160°x50°	130 Open - 120 Corridor	34lx Corridor 27lx Open	130 Open - 120 Corridor
EMRWST	White RAL9003	White	Self-Test	1W	6500K	165° / 160°x50°	130 Open - 120 Corridor	34lx Corridor 27lx Open	130 Open - 120 Corridor
EMRBMAN	Black RAL9005	Black	Manual Test	1W	6500K	165° / 160°x50°	130 Open - 120 Corridor	34lx Corridor 27lx Open	130 Open - 120 Corridor
EMRBST	Black RAL9005	Black	Self-Test	1W	6500K	165° / 160°x50°	130 Open - 120 Corridor	34lx Corridor 27lx Open	130 Open - 120 Corridor

## Wiring information

Cable / Flying Lead	300mm long flying lead, H03VVH2-F 2x0.75mm <sup>2</sup>
Type of Wiring Required	Parallel

## Accessories

Office	Remote emergency lighting for mains lighting range	Sold Separately
Education	Remote emergency lighting for mains lighting range	Sold Separately
Retail	Remote emergency lighting for mains lighting range	Sold Separately
Hotel & Leisure	Remote emergency lighting for mains lighting range	Sold Separately



collingwood

01604 495 151  
collingwoodlighting.com

collingwoodled  
 /collingwoodlighting  
 collingwoodlighting

## Guarantee

4 years on electronics, 2 years on battery

## Features & benefits

High efficacy of 130lm/W

Quick and easy installation with loop-in/loop-out connector

Low energy consumption of 1W


Interchangeable lens supplied making it easy to use the same product in both open area and corridor applications

High performance providing up to 17 metre spacings

Lithium iron phosphate LiFePO<sub>4</sub> battery

Flexible battery compartment makes it easy to insert into a ceiling cut-out

## Beam angles: 165° 160°x50°

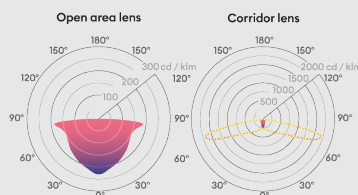

250mm

