

# Dimmable Driver

DRC20/DA DRC20/DA

## Dimmable Driver: 20W DALI2 primary push dim driver

- Multiple constant current output selections (200-550mA)
- Push-fit terminals
- DALI 2 dimmable, Primary PUSH retractive switch dimmable
- Flicker-free
- Synchronisation function for up to 20 drivers
- Output overload protection with automatic restart
- Output short-circuit shutdown with automatic restart
- Overheating protection
- Class II IP20 independent driver
- SELV equivalent


### Overview

Kosnic's constant current dimmable LED drivers are multifunctional with the option to have DALI and primary PUSH retractive switch dimming. With multiple constant current output selections (200-550mA) the dimmable driver is suitable for a variety of products.



### General Information

Installation Area Internal

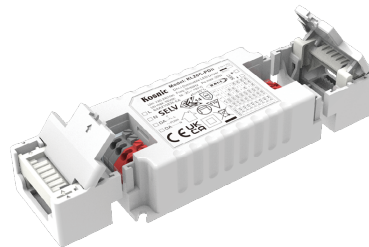

Technical Summary	
Product Code	DRC20/DA
Driver Maximum Power (W)	20 W
Driver Output Current (mA)	200-550
Driver Power Factor	0.9

Tel: 01635 523 713

Email: sales@kosnic.com

Kosnic.com



Kosnic Lighting KosnicUK KosnicLightingUK

# Dimmable Driver

DRC20/DRC20/DA

## Overview

Kosnic's constant current dimmable LED drivers are multifunctional with the option to have DALI and primary PUSH retractive switch dimming. With multiple constant current output selections (200-550mA) the dimmable driver is suitable for a variety of products.



## General Information

Installation Area      Internal

Output Current (mA)	Output Voltage (Vdc)	Max. Load (W)	Max. Input Power (W)	Max. Input Current at 230V, 50Hz, full load	Power factor at 230V, 50Hz, full load	Efficiency % at 230V, 50Hz, full load
200	3-45	9	10	49	0.9	88
250	3-45	11	13	62	0.9	88
300	3-45	14	15	74	0.9	88
350	3-45	16	18	82	0.95	88
400	3-45	18	20	94	0.95	88
450	3-45	20	23	105	0.95	88
500	3-40	20	23	104	0.95	88
550	3-36	20	23	103	0.95	88

Tel: 01635 523 713

Email: [sales@kosnic.com](mailto:sales@kosnic.com)

[Kosnic.com](http://Kosnic.com)

