

Open area version

Corridor version

Salvus Surface

High Performance Emergency Spot

Features

| | |
|------------------------|-------------|
| IK Rating | IK04 |
| IP Rating | IP65 |
| CSP Switchable | Single CCT |
| LED Lifetime | L70 50,000h |
| Colour Rendering Index | CRI>80 |

Installation information

| | |
|---------------------------|--|
| Install Connector Type | Integrated terminals, loop-in/loop-out |
| Inrush Current | 3A |
| Construction Material | Polycarbonate |
| Weight | 380g |
| Ambient Temperature Range | 0°C - 45°C |
| Electric Class (1, 2, 3) | 2 |

Photometrics @ 25°C

| Product code | Finish | Feature I | Feature II | W | Colour | Beam | lm | lm/W | EM |
|--------------|---------------|-----------|-------------|----|--------|-----------------|-------------------------|------|-------------------------|
| EMWSQEM | White RAL9003 | White | Manual Test | 2W | 6500K | 165° / 160°x50° | 280 Open - 230 Corridor | 140 | 280 Open - 230 Corridor |
| EMSWRDEM | White RAL9003 | White | Manual Test | 2W | 6500K | 165° / 160°x50° | 280 Open - 230 Corridor | 140 | 280 Open - 230 Corridor |
| EMSBSQEM | Black RAL9005 | Black | Manual Test | 2W | 6500K | 165° / 160°x50° | 280 Open - 230 Corridor | 140 | 280 Open - 230 Corridor |
| EMSBREDEM | Black RAL9005 | Black | Manual Test | 2W | 6500K | 165° / 160°x50° | 280 Open - 230 Corridor | 140 | 280 Open - 230 Corridor |

Wiring information

| | |
|-------------------------|-------------------------|
| Cable / Flying Lead | 0.75-4.0mm ² |
| Type of Wiring Required | Parallel |

Accessories

| | | |
|-----------------|--|-----------------|
| Office | Remote emergency lighting for mains lighting range | Sold Separately |
| Education | Remote emergency lighting for mains lighting range | Sold Separately |
| Retail | Remote emergency lighting for mains lighting range | Sold Separately |
| Hotel & Leisure | Remote emergency lighting for mains lighting range | Sold Separately |



collingwood

01604 495 151
collingwoodlighting.com

collingwoodled

/collingwoodlighting

collingwoodlighting

Guarantee

4 years on electronics, 2 years on battery

Features & benefits

High efficacy of 140lm/W


Quick and easy installation with loop-in/loop-out connector

Low energy consumption of 2W



Interchangeable lens supplied making it easy to use the same product in both open area and corridor applications

Lithium iron phosphate LiFePO4 battery

Beam angles: 165° 160°x50°

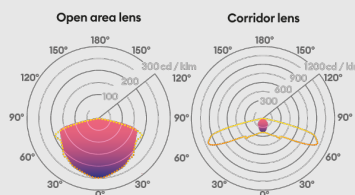

155mm



155mm

155mm



155mm