



01604 495 151  
collingwoodlighting.com

-  collingwoodled
-  /collingwoodlighting
-  collingwoodlighting

# Fountain RGBW

Water feature light

## Features

IK Rating	IK08
IP Rating	IP68
CSP Switchable	RGBW
Walk Over / Drive Over	Walk over
Dimmable Option	Yes
LED Lifetime	L70 50,000h
Colour Rendering Index	CRI>80
Colour Consistency	SDCM3

## Installation information

Install Connector Type	Flying lead
Cut Out Size	167
UK Bathroom Zone	0, 1 (with dimming)
Inrush Current	N/A
Construction Material	316 Stainless Steel
Weight	2.58kg
Ambient Temperature Range	-25°C - 40°C
SELV	Yes
Electric Class (1, 2, 3)	3

## Wiring information

Cable / Flying Lead	Pre-wired 5.0M H05RN-F, 2x1.0mm <sup>2</sup>
Type of Wiring Required	Series

## LED drivers

CCDRV75DALI	220-240V	Yes	Yes (Dali)	2	N/A	1
CCDRV75DMX	220-240V	Yes	Yes	2	N/A	1
CCDRV75RF	220-240V	Yes	Yes	2	N/A	1

## Accessories

JB7	5 pole screw terminal IP68 connector	Sold Separately
-----	--------------------------------------	-----------------

## PRODUCT CODES

Colour / Finish	Description
Foux167RGBW Stainless steel 316	Fountain Constant Current 167mm RGBW 35° Non-Dim

## Guarantee

5 years

## Features & benefits

RGBW

IP68 suitable for full submersion into water

Suitable for coastal C5 and high acid and alkali environment

316 Stainless steel housing and titanium cover provides outstanding corrosion resistance

Clear but strong 8mm tempered glass cover provides high efficiency and clear colour accuracy

TRIAC mains dimmable as standard with RGBW option

Pre-wired with 5 metres of cable to aid the installer

To be installed under water to prevent over-heating


1 1/2" BSP thread enables installation onto fabricated pipework

24V version available

Light source energy efficiency:



Beam angle: 35°

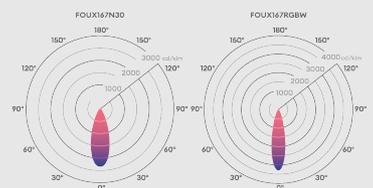

Ø182mm

