



GL018 SQ

0.4W, 4lm mini square marker ground light

Features

IK Rating	IK07
IP Rating	IP68
CSP Switchable	Single CCT
Walk Over / Drive Over	Walk over
LED Lifetime	L70 30,000h
Colour Rendering Index	CRI>80
Colour Consistency	SDCM3

Installation information

Cut Out Size	28
UK Bathroom Zone	0
Inrush Current	N/A
Construction Material	Stainless steel (316)
Weight	300g
Ambient Temperature Range	35°C
Electric Class (1, 2, 3)	3

Photometrics @ 25°C

Product code	Finish	W	Colour	Beam	lm	lm/W	lx @ 1m
GL018 SQ NW	Stainless steel	0.4W	4000K	120°	4	10	1
GL018 SQ WW	Stainless steel	0.5W	3000K	120°	3	6	1
GL018 SQ BLUE	Stainless steel	0.5W	Blue	120°	0.5	1.3	0.18

Energy rating is a reflection of the LED light source.

Wiring information

Cable / Flying Lead	1m (H05RN-F) rubberised cable (outside diameter: 6mm)
Type of Wiring Required	Parallel

LED drivers

PS1524	220-240V	Yes	Yes (with PDCINT 1-10V)	0 (1 when dimming)	1	30
PS3024B	220-240V	Yes	Yes (with PDCINT 1-10V)	0 (1 when dimming)	1	60
LSD6024	220-240V	Yes	Yes (with PDCINT 1-10V)	0 (1 when dimming)	1	120

Accessories

JB1 / JB5 / JB6	IP68 waterproof connectors	Sold Separately
PDC/GRID DIMMER	Grid dimmer kit for multiple fitting types	Sold Separately
PDCINT1-10V	1-10V dimming interface for use with 24V LED drivers	Sold Separately



collingwood

01604 495 151
collingwoodlighting.com

- collingwoodled
 /collingwoodlighting
 collingwoodlighting

Guarantee

3 year extended warranty (see "NEW" codes which now have a 7 year extended warranty)


Features & benefits

- 0.5W at 24V DC
- Frosted effect for low glare and soft lighting
- Low voltage ground light
- Square bezel for a different decorative effect
- Robust cable for outdoor use
- Shallow depth for easy installation
- Easy and quick installation with parallel wiring

Light source
energy efficiency:



Beam angle: 120°

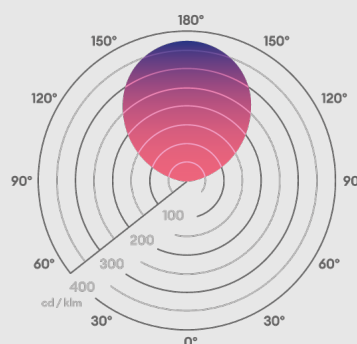

36x36mm

