



## GL019 SQ

Up to 2W, 130lm square mini ground light

### Features

IK Rating	IK07
IP Rating	IP68
CSP Switchable	Single CCT
Walk Over / Drive Over	Walk over
LED Lifetime	L70 70,000h
Colour Rendering Index	CRI>80
Colour Consistency	SDCM3

### Installation information

Cut Out Size	33
UK Bathroom Zone	0
Inrush Current	N/A
Construction Material	Stainless steel (316)
Weight	134g
Ambient Temperature Range	50°C
Electric Class (1, 2, 3)	3

### Photometrics @ 25°C

Product code	Finish	Colour	Beam	W	lm	lm/W	lx @ 1m	W	lm	lm/W	lx @ 1m
				350mA				700mA			
GL019 SQ F NW	Stainless steel	4000K	20°	1W	90	35	396	2W	130	-	572
GL019 SQ S NW	Stainless steel	4000K	12°	1W	90	90	1833	2W	130	65	2648
GL019 SQ F WW	Stainless steel	3000K	20°	1W	80	90	353	2W	125	65	551
GL019 SQ F BLUE	Stainless steel	Blue	20°	1W	10	90	44	2W	20	65	88
GL019 SQ S BLUE	Stainless steel	Blue	12°	1W	10	10	204	2W	20	10	407

### Wiring information

Cable / Flying Lead	1m (H05RN-F) rubberised cable (outside diameter: 6mm)
Type of Wiring Required	Series

### LED drivers

PLU/350 1-9	220-240V	Yes	No	0	1	9
PLU/700 3-9	220-240V	Yes	No	0	3	9
PSIP70018W	220-240V	Yes	No	0	1	8

### Accessories

JB2 / JB4 / JB6	IP68 waterproof connectors	Sold Separately
TUBE332	Installation tube	Sold Separately
PDC/GRID DIMMER	Grid dimmer kit for multiple fitting types	Sold Separately



collingwood

01604 495 151  
collingwoodlighting.com

collingwoodled

/collingwoodlighting

collingwoodlighting

### Guarantee

7 years

### Features & benefits

1W at 350mA or 2W at 700mA

Coastal protected

Low voltage ground light

Square baffle for a different decorative effect


Shallow depth for easy installation

Marine-grade stainless steel 316

Light source energy efficiency:



Beam angles: 12° 20°

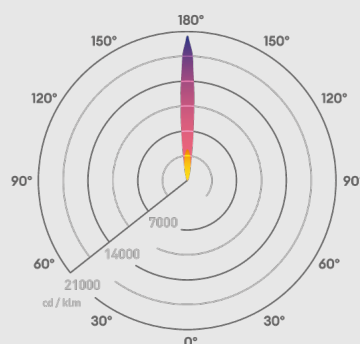

40x40mm

