



# GL019

Up to 2W, 180lm mini ground light

## Features

IK Rating	IK07
IP Rating	IP68
CSP Switchable	Single CCT
Walk Over / Drive Over	Walk over (Stainless Steel & Antique Brass Only)
LED Lifetime	L70 70,000h
Colour Rendering Index	CRI>80
Colour Consistency	SDCM3

## Installation information

Cut Out Size	33
UK Bathroom Zone	0
Inrush Current	N/A
Construction Material	Stainless steel (316)
Weight	204g
Ambient Temperature Range	50°C
Electric Class (1, 2, 3)	3

## Wiring information

Cable / Flying Lead	1m (H05RN-F) rubberised cable (outside diameter: 6mm)
Type of Wiring Required	Series

## LED drivers

PLU/350 1-9	220-240V	Yes	No	0	1	9
PLU/700 3-9	220-240V	Yes	No	0	3	9
PSIP70018W	220-240V	Yes	No	0	1	8

## Accessories

JB2 / JB4 / JB6	IP68 waterproof connectors	Sold Separately
TUBE332	Installation tube	Sold Separately
PDC/GRID DIMMER	Grid dimmer kit for multiple fitting types	Sold Separately



collingwood

01604 495 151  
collingwoodlighting.com

- collingwoodled
- /collingwoodlighting
- collingwoodlighting

## Guarantee

7 years



## Features & benefits

- 1W at 350mA or 2W at 700mA
- Coastal protected
- Low voltage ground light
- Compact yet powerful fitting
- Shallow depth for easy installation
- Robust cable for outdoor use

Light source  
energy efficiency:



Beam angles: 12° 38°

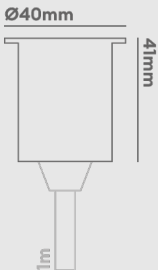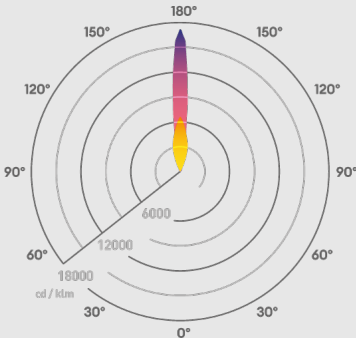

## Photometrics @ 25°C


Product code	Finish	W	Colour	Beam	lm	lm/W	lx @ 1m
GL019 F NW	Stainless steel	1W (350mA)	4000K	38°	100	100	356
GL019 F NW	Stainless steel	2W (700mA)	4000K	38°	180	90	641
GL019 S NW	Stainless steel	1W (350mA)	4000K	12°	100	100	1715
GL019 S NW	Stainless steel	2W (700mA)	4000K	12°	180	90	3087
GL019 F WW	Stainless steel	1W (350mA)	3000K	38°	90	90	320
GL019 F WW	Stainless steel	2W (700mA)	3000K	38°	150	75	534
GL019 S WW	Stainless steel	1W (350mA)	3000K	12°	90	90	1543
GL019 S WW	Stainless steel	2W (700mA)	3000K	12°	150	75	2572
GL019 F 27	Stainless steel	1W (350mA)	2700K	38°	80	80	285
GL019 F 27	Stainless steel	2W (700mA)	2700K	38°	130	65	463
GL019 S 27	Stainless steel	1W (350mA)	2700K	12°	80	80	1372
GL019 S 27	Stainless steel	2W (700mA)	2700K	12°	130	65	2229
GL019 F AMBER	Stainless steel	1W (350mA)	Amber	38°	20	20	88
GL019 F AMBER	Stainless steel	2W (700mA)	Amber	38°	-	-	-
GL019 F BLUE	Stainless steel	1W (350mA)	Blue	38°	15	15	66
GL019 F BLUE	Stainless steel	2W (700mA)	Blue	38°	25	13	110
GL019 F RED	Stainless steel	1W (350mA)	Red	38°	35	35	154
GL019 F RED	Stainless steel	2W (700mA)	Red	38°	-	-	-
GL019 S RED	Stainless steel	1W (350mA)	Red	12°	35	35	712
GL019 S RED	Stainless steel	2W (700mA)	Red	12°	-	-	-
GL019BNBX27	Black	1W (350mA)	2700K	12°	80	80	1372
GL019BNBX27	Black	2W (700mA)	2700K	12°	130	65	2229
GL019BNBX30	Black	1W (350mA)	3000K	12°	90	90	1543
GL019BNBX30	Black	2W (700mA)	3000K	12°	150	75	2572
GL019BNBX40	Black	1W (350mA)	4000K	12°	100	100	356
GL019BNBX40	Black	2W (700mA)	4000K	12°	180	90	641
GL019BNBXBL	Black	1W (350mA)	Blue	12°	15	15	306
GL019BNBXBL	Black	2W (700mA)	Blue	12°	25	13	509
GL019BWBX27	Black	1W (350mA)	2700K	38°	80	80	285
GL019BWBX27	Black	2W (700mA)	2700K	38°	130	65	463
GL019BWBX30	Black	1W (350mA)	3000K	38°	90	90	320
GL019BWBX30	Black	2W (700mA)	3000K	38°	150	75	534
GL019BWBX40	Black	1W (350mA)	4000K	38°	100	100	356
GL019BWBX40	Black	2W (700mA)	4000K	38°	180	90	641
GL019BWBXBL	Black	1W (350mA)	Blue	38°	15	15	66
GL019BWBXBL	Black	2W (700mA)	Blue	38°	25	13	110
GL019AWBX27	Antique brass	1W (350mA)	2700K	38°	80	80	285
GL019AWBX27	Antique brass	2W (700mA)	2700K	38°	130	65	463
GL019AWBX30	Antique brass	1W (350mA)	3000K	38°	90	90	320
GL019AWBX30	Antique brass	2W (700mA)	3000K	38°	150	75	534

Energy rating is a reflection of the LED light source.




collingwood

01604 495 151  
collingwoodlighting.com

 collingwoodled

 /collingwoodlighting

 collingwoodlighting

## GL019

Discreet yet powerful, this 1W LED powered ground light is perfect for decking areas, entrance halls and pathways. Indoors or out, the IP68 Stainless Steel finish ground light will give a flawless performance for many years of maintenance free operation. Available in four ambient LED colours, the GL019 is the most popular ground light in the Collingwood range.