



GL022

Square 30° slotted LED ground / step light

Features

IK Rating	IK07
IP Rating	IP68
CSP Switchable	Single CCT
Walk Over / Drive Over	Walk over
LED Lifetime	L70 70,000h
Colour Rendering Index	CRI>80
Colour Consistency	SDCM3

Installation information

Cut Out Size	50
UK Bathroom Zone	0
Inrush Current	N/A
Construction Material	Stainless steel (316)
Weight	400g
Ambient Temperature Range	35°C
Electric Class (1, 2, 3)	3

Photometrics @ 25°C

Product code	Finish	W	Colour	Beam	lm	lm/W	lx @ 1m
GL022 NW	Stainless steel	1W	4000K	30°	10	10	10
GL022 WW	Stainless steel	1W	3000K	30°	8	8	8
GL022 27	Stainless steel	1W	2700K	30°	8	8	7

Wiring information

Cable / Flying Lead	1m (H05RN-F) rubberised cable (outside diameter: 6mm)
Type of Wiring Required	Series

LED drivers

PLU/350 1-9	220-240V	Yes	No	0	1	9
PSIP3509W	220-240V	Yes	No	0	1	8
PSMD35039	220-240V	Yes	Yes (mains)	0	3	9

Accessories

JB2 / JB4 / JB6	IP68 waterproof connectors	Sold Separately
TUBE/50	Installation tube	Sold Separately
WCR 275 BLACK	2-core rubber cable	Sold Separately
PDC/GRID DIMMER	Grid dimmer kit for multiple fitting types	Sold Separately



collingwood

01604 495 151
collingwoodlighting.com

- collingwoodled
- /collingwoodlighting
- collingwoodlighting

Guarantee

7 years


Features & benefits

- 1W at 350mA
- Coastal protected
- Low voltage groundlight
- Angled light, ideal for use as a step light
- Robust cable for outdoor use
- Brushed stainless steel for sleek effect

Light source
energy efficiency:



Beam angles: C0/C180 C90/C270

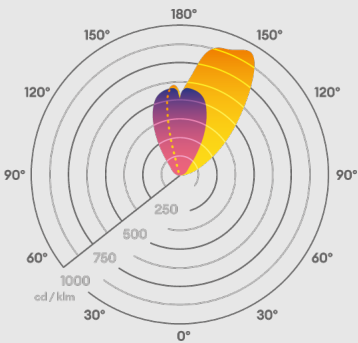

60x60mm

