

Ground lights specification sheet



GL038

2.9W, 300lm ground light

Features

IK Rating	IK08
IP Rating	IP65
CSP Switchable	Single CCT
Walk Over / Drive Over	Walk over (Stainless Steel & Antique Brass Only)
LED Lifetime	L70 70,000h
Colour Rendering Index	CRI>80
Colour Consistency	SDCM3
Driver Rated Wattage	4W

Installation information

Cut Out Size	80-85
UK Bathroom Zone	2
Inrush Current	60A 0.037ms
Construction Material	Stainless steel 316 (top) / aluminium (body)
Weight	696g
Ambient Temperature Range	35°C
SELV	Yes
Electric Class (1, 2, 3)	1

Photometrics @ 25°C

Product code	Finish	W	Colour	Beam	lm	lm/W	lx @ 1m
GL038DWBM27	Stainless steel 316	2.9W	2700K	40°	280	96	526
GL038DWBM30	Stainless steel 316	2.9W	3000K	40°	290	100	544
GL038DWBM40	Stainless steel 316	2.9W	4000K	40°	300	103	563
GL038AWBM27	Antique brass	2.9W	2700K	40°	280	96	526
GL038AWBM30	Antique brass	2.9W	3000K	40°	290	100	544

Energy rating is a reflection of the LED light source.

Wiring information

Cable / Flying Lead	1m H05RN-F rubberised cable (outside diameter: 7mm)
Type of Wiring Required	Parallel

LED driver

N/A (integrated SELV driver)	220-240V	Yes	No	2	N/A	N/A
------------------------------	----------	-----	----	---	-----	-----

Accessories

Installation Tube	For easy ground installation	Included
JB5	Gel filled waterproof connector	Sold Separately
WC 5-9	Quick waterproof connector	Sold Separately



collingwood

01604 495 151
collingwoodlighting.com

collingwoodled

/collingwoodlighting

collingwoodlighting

Guarantee

7 years

Features & benefits

2.9W

Coastal protected

Mains voltage groundlight

Single LED and lens combination for maximum efficiency and optimal light distribution


Marine grade stainless steel 316 or antique brass

Long lifetime of 70,000hrs

Light source energy efficiency:



Beam angle: 40°

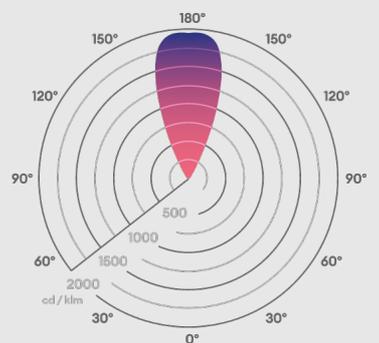

Ø98mm

