



GL040

2W, 215lm ground light

Features

IK Rating	IK08
IP Rating	IP68
CSP Switchable	Single CCT
Tilttable	No
Walk Over / Drive Over	No
LED Lifetime	L70 70,000h
Colour Rendering Index	CRI>80
Colour Consistency	SDCM3

Installation information

Cut Out Size	70
UK Bathroom Zone	0
Inrush Current	N/A
Construction Material	Brass
Weight	0.6
Ambient Temperature Range	35°C
Electric Class (1, 2, 3)	3

Photometrics @ 25°C

Product code	Finish	W	Colour	Beam	lm	lm/W	lx @ 1m
GL040ANBX27	Antique brass	2.2W (350mA)	2700K	12°	290	132	3096
GL040ANBX27	Antique brass	4.6W (700mA)	2700K	12°	515	112	5499
GL040ANBX30	Antique brass	2.2W (350mA)	3000K	12°	300	136	3203
GL040ANBX30	Antique brass	4.6W (700mA)	3000K	12°	520	113	5552
GL040AWBX27	Antique brass	2.2W (350mA)	2700K	40°	290	132	562
GL040AWBX27	Antique brass	4.6W (700mA)	2700K	40°	515	112	998
GL040AWBX30	Antique brass	2.2W (350mA)	3000K	40°	300	136	581
GL040AWBX30	Antique brass	4.6W (700mA)	3000K	40°	520	113	1008

Energy rating is a reflection of the LED light source.

Wiring information

Cable / Flying Lead	1m (H05RN-F) rubberised cable (outside diameter: 6mm)
Type of Wiring Required	Series

LED drivers

PLU/350 1-9	220-240V	Yes	No	0	1	4
PLU/700 3-9	220-240V	Yes	No	0	1	4
PSIP70018W	220-240V	Yes	No	0	1	3



collingwood

01604 495 151
collingwoodlighting.com

collingwoodled

/collingwoodlighting

collingwoodlighting

Guarantee

7 years

Features & benefits

2.2W at 350mA or 4.6W at 700mA

Baffled for low glare and visual comfort

Low voltage ground light

Single LED and lens combination for maximum efficiency and optimal light distribution


Marine grade stainless steel 316 or antique brass

Long lifetime of 70,000hrs


Light source
energy efficiency:



Beam angles: 12° 40°

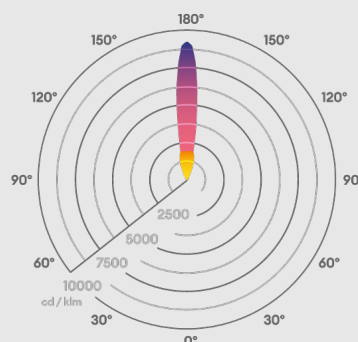

Ø76mm

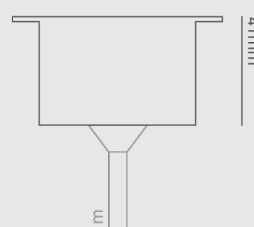


Accessories


JB2 / JB4 / JB6	IP68 Boxes	Sold Separately
TUBE/68	Installation tube	Sold Separately
PDC/GRID DIMMER	Grid dimmer kit for multiple fitting types	Sold Separately




collingwood

01604 495 151
collingwoodlighting.com

 [collingwoodled](https://www.instagram.com/collingwoodled)

 [/collingwoodlighting](https://www.facebook.com/collingwoodlighting)

 [collingwoodlighting](https://www.linkedin.com/company/collingwoodlighting)

GL040

The GL040 is part of Collingwood's submersible LED range. This range has single point source lens, giving it a modern look and feel. With this being IP68 and IK08, it is perfect for outdoor use, and with its marine-grade stainless steel 316, these ground lights are a stunning way to illuminate walls, trees and walkways. Available in two colour temperatures and two beam angles to suit any interior or exterior design.