



GL050RGBW

Colour change LED ground / marker light (5W max.)

Features

IK Rating	IK08
IP Rating	IP67
CSP Switchable	RGBW
Walk Over / Drive Over	Walk over (Stainless Steel Only)
LED Lifetime	L50 50,000h

Installation information

Cut Out Size	70
UK Bathroom Zone	1
Construction Material	Stainless steel (316)
Weight	800g
Ambient Temperature Range	35°C
Electric Class (1, 2, 3)	3

Wiring information

Cable / Flying Lead	2x 1m CR575RGBW (outside diameter: 7.4mm)
Type of Wiring Required	Series

LED drivers

CCDRV75DALI	220-240V	Yes	Yes (Dali)	2	N/A	13
CCDRV75DMX	220-240V	Yes	Yes	2	N/A	13
CCDRV75RF	220-240V	Yes	Yes	2	N/A	13

Accessories

TUBE/68	Installation tube	Sold Separately
JB7	5-pole IP68 inline connector	Sold Separately
CR575RGBW	5-core PVC cable	Sold Separately
CCRFCONVWIFI / CCREMOTEB / CCWALLRF(B/W)	4/8 zone RF control for RGB & RGBW system	Sold Separately

PRODUCT CODES

Colour / Finish	Short Description
GL050RGBW	Stainless steel
	Colour change LED ground / marker light (5W max.)



collingwood

01604 495 151
collingwoodlighting.com

collingwoodled

/collingwoodlighting

collingwoodlighting

Guarantee

5 years

Features & benefits

RGBW

Coastal protected

IK08 suitable for pathways

Low profile for easy installation


Compatible with a large range of controllers

Separate white LED for permanent use

Light source energy efficiency:



Beam angle: 100°

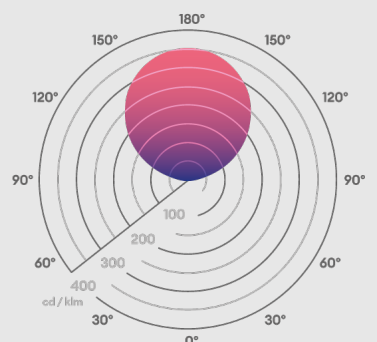

Ø76mm

