



GL06

21W, 970lm straight to mains drive over ground light

Features

IK Rating	IK08
IP Rating	IP67
CSP Switchable	Single CCT
UGR	10
Walk Over / Drive Over	Drive over
LED Lifetime	L70 30,000h
Colour Rendering Index	CRI>80
Colour Consistency	SDCM4

Installation information

Cut Out Size	196
UK Bathroom Zone	2
Inrush Current	10A 0.5ms
Construction Material	Stainless steel 316 (cover ring) / aluminium (body)
Weight	3.7kg
Ambient Temperature Range	40°C
SELV	Yes
Electric Class (1, 2, 3)	1

Photometrics @ 25°C

Product code	Finish	W	Colour	Beam	lm	lm/W	lx @ 1m
GL06X30	Stainless steel 316	21W	3000K	20°	970	46	6203

Energy rating is a reflection of the LED light source.

Wiring information

Cable / Flying Lead	300mm H05RN-F rubberised cable (outside diameter: 7mm)
Type of Wiring Required	Parallel

LED driver

N/A (integrated SELV driver)	220-240V	Yes	N/A	2	N/A	N/A
------------------------------	----------	-----	-----	---	-----	-----

Accessories

JB5	IP68 waterproof connector	Sold Separately
WCR375BLACK	3-core rubber cable	Sold Separately



collingwood

01604 495 151
collingwoodlighting.com

- collingwoodled
- /collingwoodlighting
- collingwoodlighting

Guarantee

5 years


Features & benefits

- 21W
- Coastal protected
- Mains voltage ground light
- Ideal for commercial and residential lighting, drive ways, perimeters and large trees
- Marine-grade stainless steel 316
- 196mm cut out
- High lumen output of 620lm
- A narrow beam angle of 20° for a more focused light
- Low glare UGR <10

Light source
energy efficiency:



Beam angle: 20°

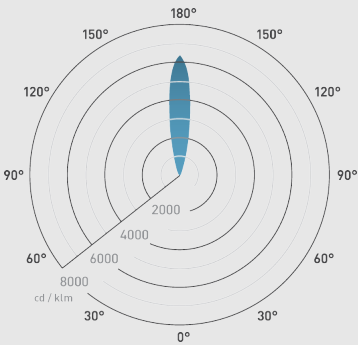

Ø215/196mm

