

# Ground lights specification sheet



01604 495 151  
collingwoodlighting.com

-  collingwoodled
-  /collingwoodlighting
-  collingwoodlighting

## GL07

8.5W, 695lm drive over LED ground light

### Features

IK Rating	IK10
IP Rating	IP67
CSP Switchable	Single CCT
Tiltable	20°
Walk Over / Drive Over	Drive over (15mph maximum)
LED Lifetime	L70 70,000h
Colour Rendering Index	CRI>80
Colour Consistency	SDCM3

### Installation information

Cut Out Size	N/A
UK Bathroom Zone	2
Inrush Current	0.92A 0.13ms
Construction Material	Stainless steel 316 (cover ring) / aluminium (body)
Weight	2.8Kg
Ambient Temperature Range	40°C
SELV	Yes
Electric Class (1, 2, 3)	1

### Photometrics @ 25°C

Product code	Finish	W	Colour	Beam	lm	lm/W	lx @ 1m
GL07D38X40	Stainless steel 316	8.5W	4000K	38°	695	82	1620
GL07D24X40	Stainless steel 316	8.5W	4000K	24°	695	82	2198
GL07D60X30	Stainless steel 316	8.5W	3000K	60°	695	82	550
GL07D38X30	Stainless steel 316	8.5W	3000K	38°	695	82	1620
GL07D24X30	Stainless steel 316	8.5W	3000K	24°	695	82	2198

Energy rating is a reflection of the LED light source.

### Wiring information

Cable / Flying Lead	1m H05RN-F rubberised cable (outside diameter: 7mm)
Type of Wiring Required	Parallel

### LED driver

N/A (driver built in)	220-240V	Yes	No	2	-	-
-----------------------	----------	-----	----	---	---	---

### Accessories

Installation tube	For easy ground installation	Included
JB5	Gel filled waterproof connector	Sold Separately
WC 5-9	Quick waterproof connector	Sold Separately

### Guarantee


5 years

### Features & benefits

- 8.5W
- Coastal protected
- Mains voltage ground light
- Adjustable LED fittings
- High lumen output of 695lm
- Robust cable for outdoor use
- Installation tube included
- Ideal for driveways with 10mm toughened glass

Light source energy efficiency: 

Beam angles: 24° 38° 60°

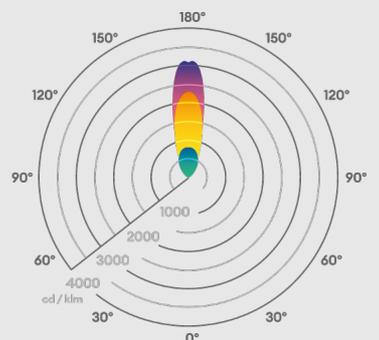

Ø185/180mm

