



SLO30

1W LED spike light

Features

IP Rating	IP65
CSP Switchable	Single CCT
Tiltable	90°
Rotation Angle	No
LED Lifetime	L70 70,000h
Colour Rendering Index	CRI>80
Colour Consistency	SDCM3

Installation information

UK Bathroom Zone	1
Inrush Current	N/A
Construction Material	Stainless steel (316)
Weight	700g
Ambient Temperature Range	35°C
SELV	N/A
Electric Class (1, 2, 3)	3

Photometrics @ 25°C

Product code	Finish	Colour	Beam	350mA				700mA			
				W	lm	lm/W	lx @ 1m	W	lm	lm/W	lx @ 1m
SL030 F NW	Stainless steel 316	4000K	26°	1W	95	95	267	2W	140	70	393
SL030 F WW	Stainless steel 316	3000K	26°	1W	75	75	210	2W	135	68	379
SL030 F 27	Stainless steel 316	2700K	26°	1W	70	70	196	2W	120	60	337

Energy rating is a reflection of the LED light source.

Wiring information

Cable / Flying Lead	3m H05RN-F rubberised cable (outside diameter: 6mm)
Type of Wiring Required	Series

LED drivers

DRV150700 (all settings)	220-240V	Yes	No	N/A	N/A	N/A
DRV350700TD (700mA)	220-240V	Yes	Yes	N/A	N/A	N/A
PSIP70018W	220-240V	Yes	No	1	1	8

Accessories

JB2 / JB4 / JB6	Waterproof junction box / Gel filled waterproof connectors	Sold Separately
WCR 275 BLACK	2-core rubber cable	Sold Separately



collingwood

01604 495 151
collingwoodlighting.com

- collingwoodled
- /collingwoodlighting
- collingwoodlighting

Guarantee

7 years


Features & benefits

- 1W at 350mA or 2W at 700mA
- Coastal protected
- IP65 ideal for outdoor areas
- Long spike included for extra stability
- Robust cable for outdoor use
- Small & discreet
- Single Point Source LED

Light source energy efficiency:



Beam angle: 26°

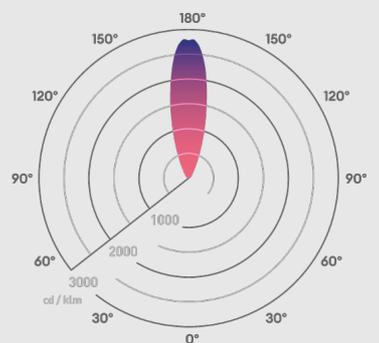

Ø42mm

