


Spike lights specification sheet

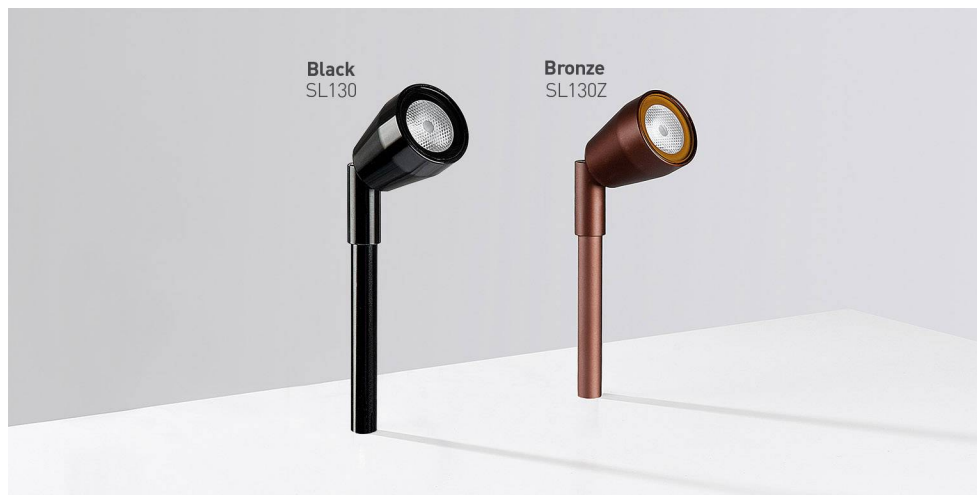

SL130

1W LED spike light

Features

IP Rating	IP65
CSP Switchable	Single CCT
Tilttable	90°
LED Lifetime	L70 70,000h
CRI	CRI>80
SDCM	SDCM3

Installation information

UK Bathroom Zone	1
Inrush Current	N/A
Construction Material	Anodised aluminium
Weight	405g
Ambient Temperature Range	35°C
Electric Class (1, 2, 3)	3

Photometrics @ 25°C

Product code	Finish	Colour	Beam	W	lm	lm/W	lx @ 1m	W	lm	lm/W	lx @ 1m
				350mA				700mA			
SL13040	Black anodised aluminium	4000K	26°	1W	95	95	267	2W	140	70	393
SL13030	Black anodised aluminium	3000K	26°	1W	75	75	210	2W	135	68	379
SL13027	Black anodised aluminium	2700K	26°	1W	70	70	196	2W	120	60	337
SL130ZMBX27	Bronze anodised aluminium	2700K	26°	1W	70	70	196	2W	120	60	337
SL130ZMBX30	Bronze anodised aluminium	3000K	26°	1W	75	75	210	2W	135	68	379

Wiring information

Cable / Flying Lead	3m H05RN-F rubberised cable (outside diameter: 6mm)
Type of Wiring Required	Series

LED drivers

PLU/350 1-9	220-240V	Yes	No	1	1	9
PLU/700 3-9	220-240V	Yes	No	1	3	9
PSIP70018W	220-240V	Yes	No	1	1	8

Accessories

JB2 / JB4 / JB6	Waterproof junction box / Gel filled waterproof connectors	Sold Separately
WCR 275 BLACK	2-core rubber cable	Sold Separately
PDC/GRID DIMMER	1-10V dimmer module	Sold Separately



collingwood

01604 495 151
collingwoodlighting.com

collingwoodled

/collingwoodlighting

collingwoodlighting

Guarantee

7 years


Features & benefits

1W at 350mA or 2W at 700mA
Coastal protected
IP65 ideal for outdoor areas
Long spike included for extra stability
Robust cable for outdoor use
Small & discreet

Light source
energy efficiency:



Beam angle: 26°

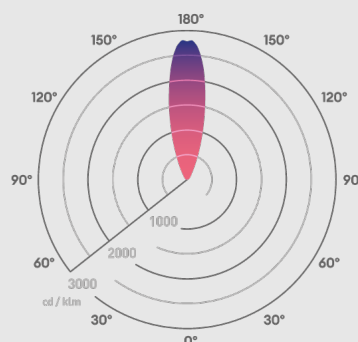

Ø42mm

