


Spike lights specification sheet

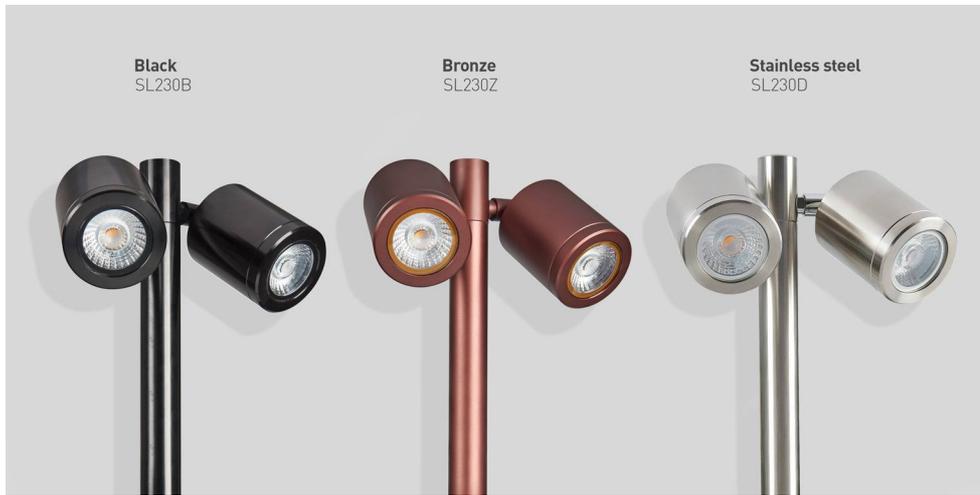

SL230 Mains

Mains voltage LED twin pole spike light

Features

| | |
|------------------------|-------------|
| IP Rating | IP65 |
| CSP Switchable | Single CCT |
| Tilttable | 90° |
| Rotation Angle | 330° |
| LED Lifetime | L70 70,000h |
| Colour Rendering Index | CRI>80 |
| Colour Consistency | SDCM3 |

Installation information

| | |
|---------------------------|---|
| UK Bathroom Zone | N/A |
| Inrush Current | 120A 375s |
| Construction Material | Anodised aluminium |
| Weight | SL230B: 1578g SL230D: 3500g SL230Z: 1577g |
| Ambient Temperature Range | 35°C |
| SELV | Yes |
| Electric Class (1, 2, 3) | 1 |

Photometrics @ 25°C

| Product code | Finish | W | Colour | Beam | lm | lm/W | lx @ 1m |
|--------------|---------------------------|-------|--------|------|------|--------|----------|
| SL230ZWBM30 | Bronze anodised aluminium | 11.4W | 3000K | 40° | 1040 | 2 x 91 | 2 x 1182 |
| SL230BWBM27 | Black anodised aluminium | 11.4W | 2700K | 40° | 1030 | 2 x 90 | 2 x 1171 |
| SL230BWBM30 | Black anodised aluminium | 11.4W | 3000K | 40° | 1040 | 2 x 91 | 2 x 1182 |
| SL230DWBM27 | Stainless steel | 11.4W | 2700K | 40° | 1030 | 2 x 90 | 2 x 1171 |
| SL230DWBM30 | Stainless steel | 11.4W | 3000K | 40° | 1040 | 2 x 91 | 2 x 1182 |

Energy rating is a reflection of the LED light source.

Wiring information

| | |
|-------------------------|---|
| Cable / Flying Lead | 3m H05RN-F rubberised cable (outside diameter: 7mm) |
| Type of Wiring Required | Parallel |

LED driver

| | | | | | | |
|------------------------------|----------|-----|----|-----|-----|-----|
| N/A (integrated SELV driver) | 220-240V | Yes | No | N/A | N/A | N/A |
|------------------------------|----------|-----|----|-----|-----|-----|

Accessories

| | | |
|-------|--|-----------------|
| JB5 | Gel filled waterproof connector | Sold Separately |
| GH220 | Simple hood to reduce glare whilst maintaining a good light distribution | Sold Separately |
| GS220 | Simple hood to reduce glare whilst maintaining a good light distribution | Sold Separately |



collingwood

01604 495 151
collingwoodlighting.com

- collingwoodled
- /collingwoodlighting
- collingwoodlighting

Guarantee

7 years

Features & benefits

- 11.4W
- Coastal protected
- IP65 ideal for outdoor areas
- Adjustable pole-mounted twin heads are perfect for illuminating paths, steps and trees
- Easily ground mounted with spiked pole and single cable for quick installation
- Elegant and discreet black and bronze finishes
- Mains voltage for easy installation
- Highly efficiency of 93lm/W

Light source energy efficiency:

Beam angle: 40°

