


Spike lights specification sheet

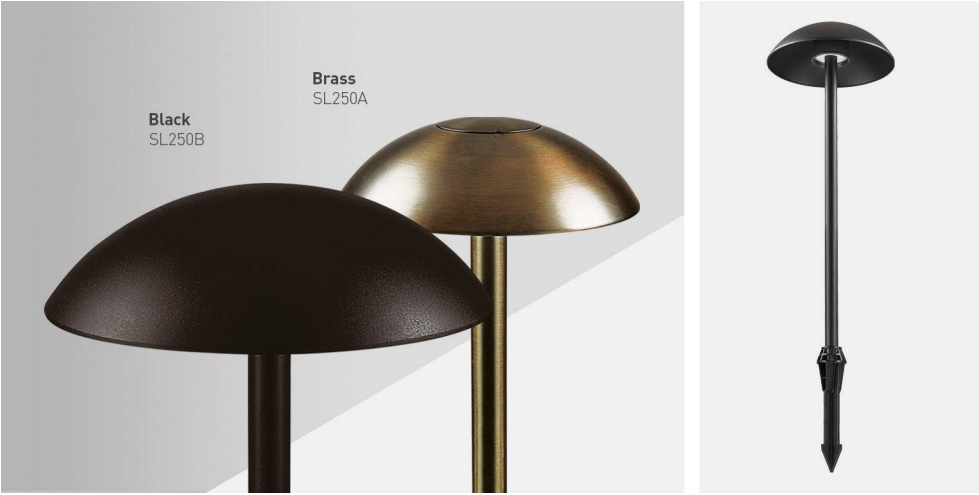

SL250

Low voltage, 24V, LED path light with spike

Features

IP Rating	IP65
CSP Switchable	Single CCT
Tilttable	No
Rotation Angle	No
Dimmable Option	No
LED Lifetime	L70 50,000h
Colour Rendering Index	CRI>80
Colour Consistency	SDCM6

Installation information

UK Bathroom Zone	N/A
Inrush Current	N/A
Construction Material	Brass, powder coated aluminium
Weight	Black: 1374g, Brass: 1390g
Ambient Temperature Range	35°C
SELV	N/A
Electric Class (1, 2, 3)	3

Photometrics @ 25°C

Product code	Finish	W	Colour	Beam	lm	lm/W	lx @ 1m
SL250ATX0X27	Brass, treated	6W	2700K	60-110°	200	50	152 / 68
SL250ATX0X30	Brass, treated	6W	3000K	60-110°	220	55	167 / 75
SL250BPX0X27	Black powder coated aluminium	6W	2700K	60-110°	200	50	152 / 68
SL250BPX0X30	Black powder coated aluminium	6W	3000K	60-110°	220	55	167 / 75

Energy rating is a reflection of the LED light source.

Wiring information

Cable / Flying Lead	1m H05RN-F rubberised cable (outside diameter: 6mm)
Type of Wiring Required	Parallel

LED drivers

PS3024B	220-240V	Yes	No	0	1	5
LSD6024	220-240V	Yes	No	0	1	9
PS7524	220-240V	Yes	N/A	0	1	12

Accessories

JB1 / JB5 / JB6	Waterproof junction box / Gel filled waterproof connectors	Sold Separately
WCR 275 BLACK	2-core rubber cable	Sold Separately



01604 495 151
collingwoodlighting.com

- collingwoodled
- /collingwoodlighting
- collingwoodlighting

Guarantee

7 years

Features & benefits

- 6W at 24V
- IP65 ideal for outdoor areas
- Low voltage product
- Robust cable for outdoor use
- Long lifetime of 50,000hrs
- 7 year warranty
- Note product is non-dimmable

Light source energy efficiency:



Beam angle: 60-110°

