



Bolt-On PIR

On/off PIR sensor with Lux level switch

Features

IP Rating	IP65
Sensor Option	PIR

Installation information

Install Connector Type	Flying lead
Construction Material	Polycarbonate
Weight	82g
Ambient Temperature Range	-20°C - 40°C

USE WITH

Borealis Batten	All variants	Sold Separately
Caiman Anti-Corrosive	All variants	Sold Separately
Lentus Lowbay	All variants	Sold Separately

PRODUCT CODES

Colour / Finish	Description	Characteristic 1
SSENBSTWH White	PIR on/off daylight Sensor	Installation height of 2-6M



collingwood

01604 495 151
collingwoodlighting.com

- collingwoodled
- /collingwoodlighting
- collingwoodlighting


Guarantee

5 years guarantee

Features & benefits

- Compatible with:
 - BOREALIS Batten
 - CAIMAN Anti-Corrosive
 - LENTUS Lowbay
- Suitable for use at heights of 2.5 to 6.0 metres
- Fast 4-minute conversion time
- M20 interface for easy installation
- Delay time can be adjusted from 30 seconds up to 30 minutes
- Lux level switch can be adjusted from 3 lux to 300 lux

Beam angle: 360°

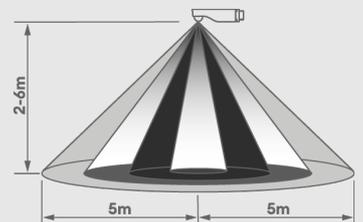

136mm

